


F250K

SLOPE
2,5%

LOAD CLASS
UP TO F900
EN-1433 STANDARD

ULMA Linear Drainage Channel type F250K: External width 312 mm; Internal width 250 mm; Available with overall heights between 150 mm and 650 mm. Suitable also with 2,5% presloped, cascaded or mixed slope, to collect rainwater in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanized steel* edges for lateral protection.


*Also available with cast iron edges.

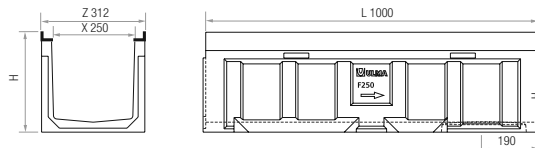

Channel	L (mm)	H (mm)		Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm²)	Slope	Pcs. (x pallet)
		h	H	Z	X	Vert.	Horiz.			
F250K01RM	500	150	150	316	250	-	-	220	-	*
F250K01	1000	150	175	316	250	-	-	280	2,5%	*
F250K02	1000	175	200	312	250	-	-	340	2,5%	*
F250K03	1000	200	225	312	250	-	-	400	2,5%	*
F250K04	1000	225	250	312	250	-	-	460	2,5%	*
F250K05	1000	250	275	312	250	-	-	520	2,5%	*
F250K06	1000	275	300	312	250	-	-	580	2,5%	*
F250K00R	1000	300	300	312	250	250	-	580	-	28
F250K07	1000	300	325	312	250	-	-	640	2,5%	*
F250K08	1000	325	350	312	250	-	-	700	2,5%	*
F250K10R	1000	350	350	312	250	250	-	700	-	28
F250K09	1000	350	375	312	250	-	-	760	2,5%	*
F250K10	1000	375	400	312	250	-	-	820	2,5%	*
F250K20R	1000	400	400	312	250	250	-	820	-	21
F250K11	1000	400	425	312	250	-	-	870	2,5%	*
F250K12	1000	425	450	312	250	-	-	930	2,5%	*
F250K30R	1000	450	450	312	250	-	-	935	-	14
F250K13	1000	450	475	312	250	-	-	985	2,5%	*
F250K14	1000	475	500	312	250	-	-	1045	2,5%	*
F250K15	1000	500	525	312	250	-	-	1100	2,5%	*
F250K16	1000	525	550	312	250	-	-	1160	2,5%	*
F250K17	1000	550	575	312	250	-	-	1215	2,5%	*
F250K18	1000	575	600	312	250	-	-	1270	2,5%	*
F250K19	1000	600	625	312	250	-	-	1320	2,5%	*
F250K20	1000	625	650	312	250	-	-	1380	2,5%	*

*Vert. and horiz. outlets on order.

CONTINUOUS PRESLOPED OF 2,5%

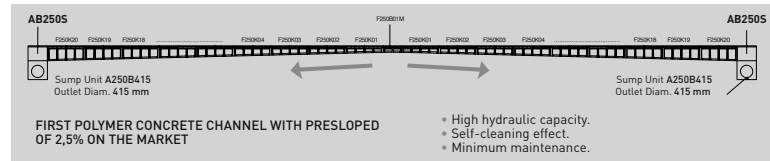

GRATING




Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX250FTCM	500	301	13,75	2
	SLOTTED	D400	FNX250FTDM	500	301	13,75	2
	SLOTTED	F900	FNX250FTFM	500	301	19	2
	SOLID	F900	FC250FTFM	500	301	-	2
GALVANIZED STEEL	SINGLE SLOT	D400	GRL250FOD (1)	1000	301	18 / H150	1

(1) Without screws.

LOCKING SYSTEM

8 BOLT LOCKING SYSTEM.
8 screws with protection cap, per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Lateral Outlet (mm)	Ø Frontal Outlet (mm)	Sump Units
AF250	500	400	316	160/200	-	1
AB250	500	400	316	160/200	-	1
AF250S-65	500	680	312	415	-	1
AB250S-65	500	680	312	415	-	1
AF250S+A250B	500	750*	316	160/200	-	2
AB250S+A250B	500	750*	316	160/200	-	2
AF250S + A250B415	500	916*	316	415	200	2
AB250S+A250B415	500	916*	316	415	200	2

* The sump unit can be higher incorporating an intermediate unit.

END CAPS



Channel	Code	Type	Ø (mm)
F250K00R	T250K00C	CLOSED	-
	T250K00A	OPEN	200
F250K10R	T250K10C	CLOSED	-
	T250K10A	OPEN	200
F250K20R	T250K20C	CLOSED	-
	T250K20A	OPEN	200
F250K30R	T250K30C	CLOSED	-
	T250K30A	OPEN	200

STEP UNITS

Code
CE250

BUCKET*

Code
C250

*Only applicable if 2 sump units are installed.

SLOPE DESIGNS

