


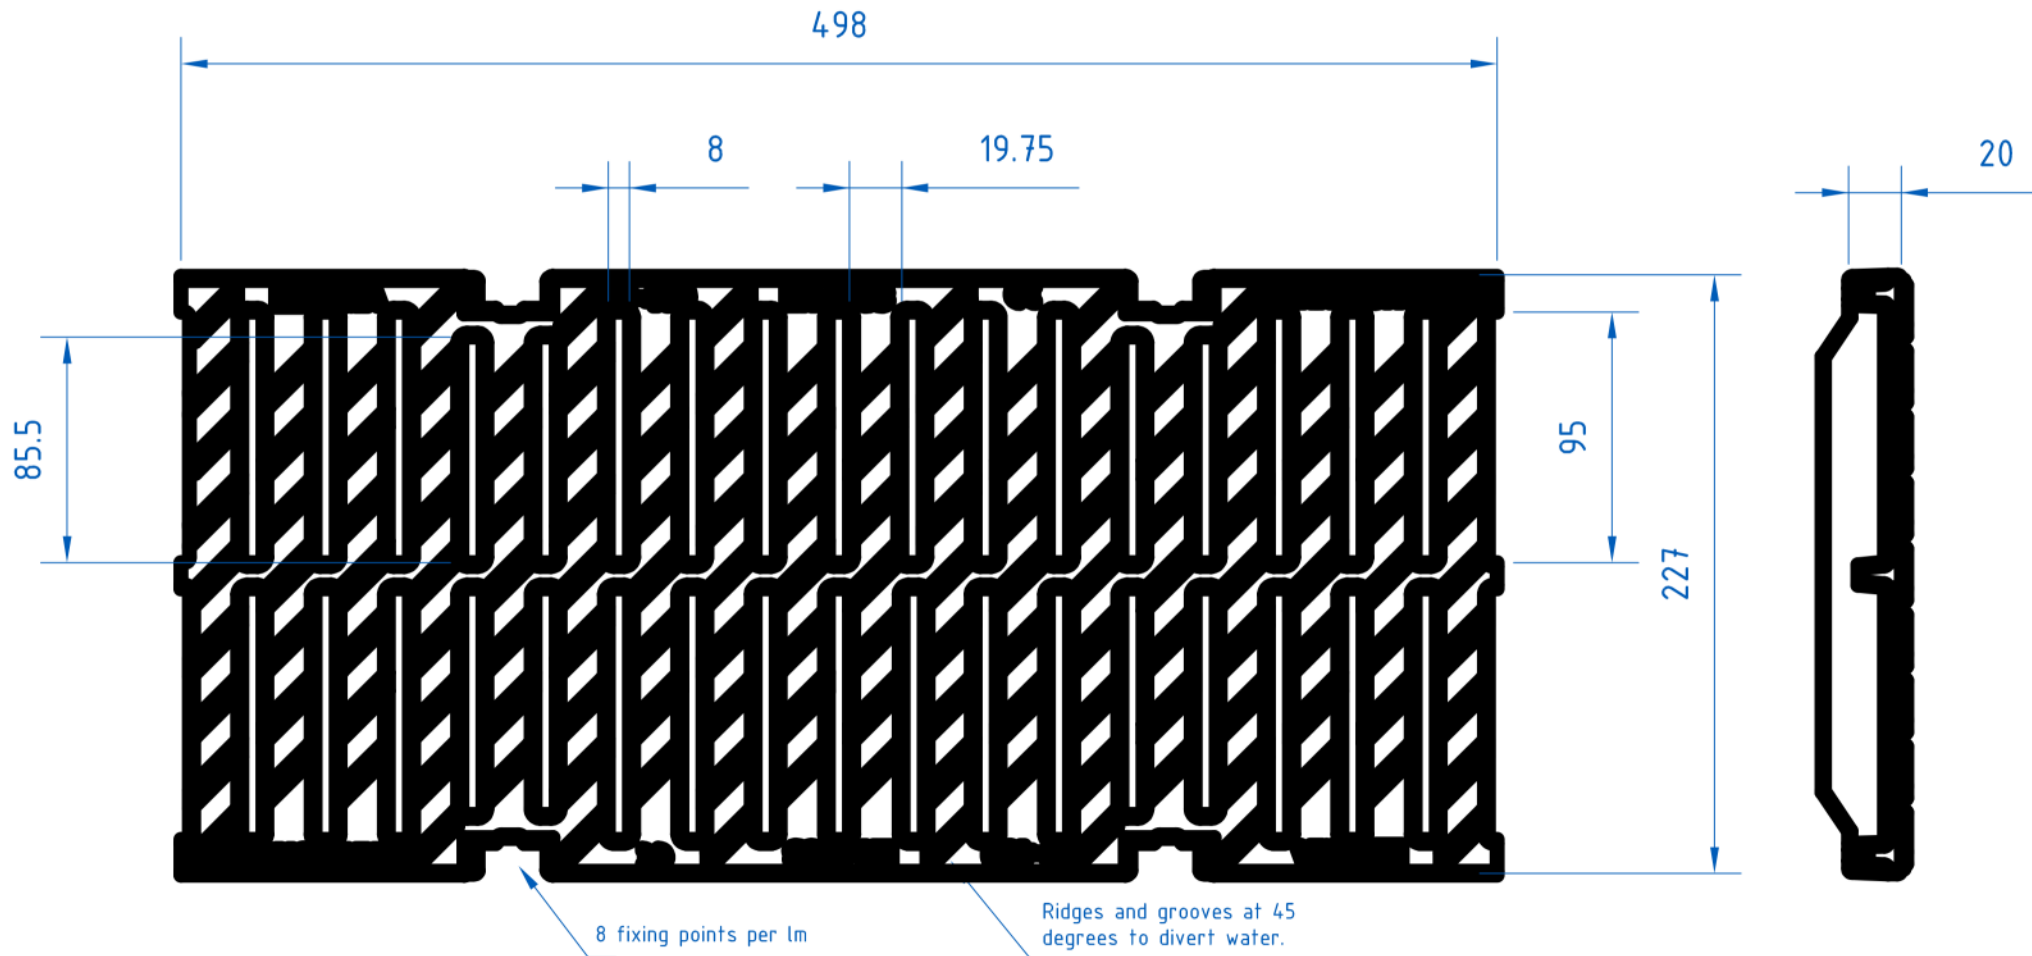

Review: 2016-04

ULMA Architectural Solutions reserves the right to modify the specifications of any of its products without prior notice.

Information about the shown products is only indicative and is based on the existing technical features at the time of issuing.

In the event of any discrepancy in the translation of this document into different languages, the Spanish version will be used.

Latest version in www.ulmaarchitectural.com

For more details, see technical sheets and installation guide.

Description

Non-slip slotted grating reference FNXH200RGDM.
 Casted espheroidal graphite ductile iron, EN 1563 Standard.
 Load class D400, EN 1433 Standard.
 Boltless locking system, 8 fixing points per 1m.
 Bolt-locking system alternative.
 Ridges and grooves at 45 degrees to divert water.
 Walking stick and heel-safe slots.
 Water catching surface: cm^2/lm .



ARCHITECTURAL SOLUTIONS



Tel.: +34 943 78 06 00
info@ulmaarchitectural.com
ulmaarchitectural.com