


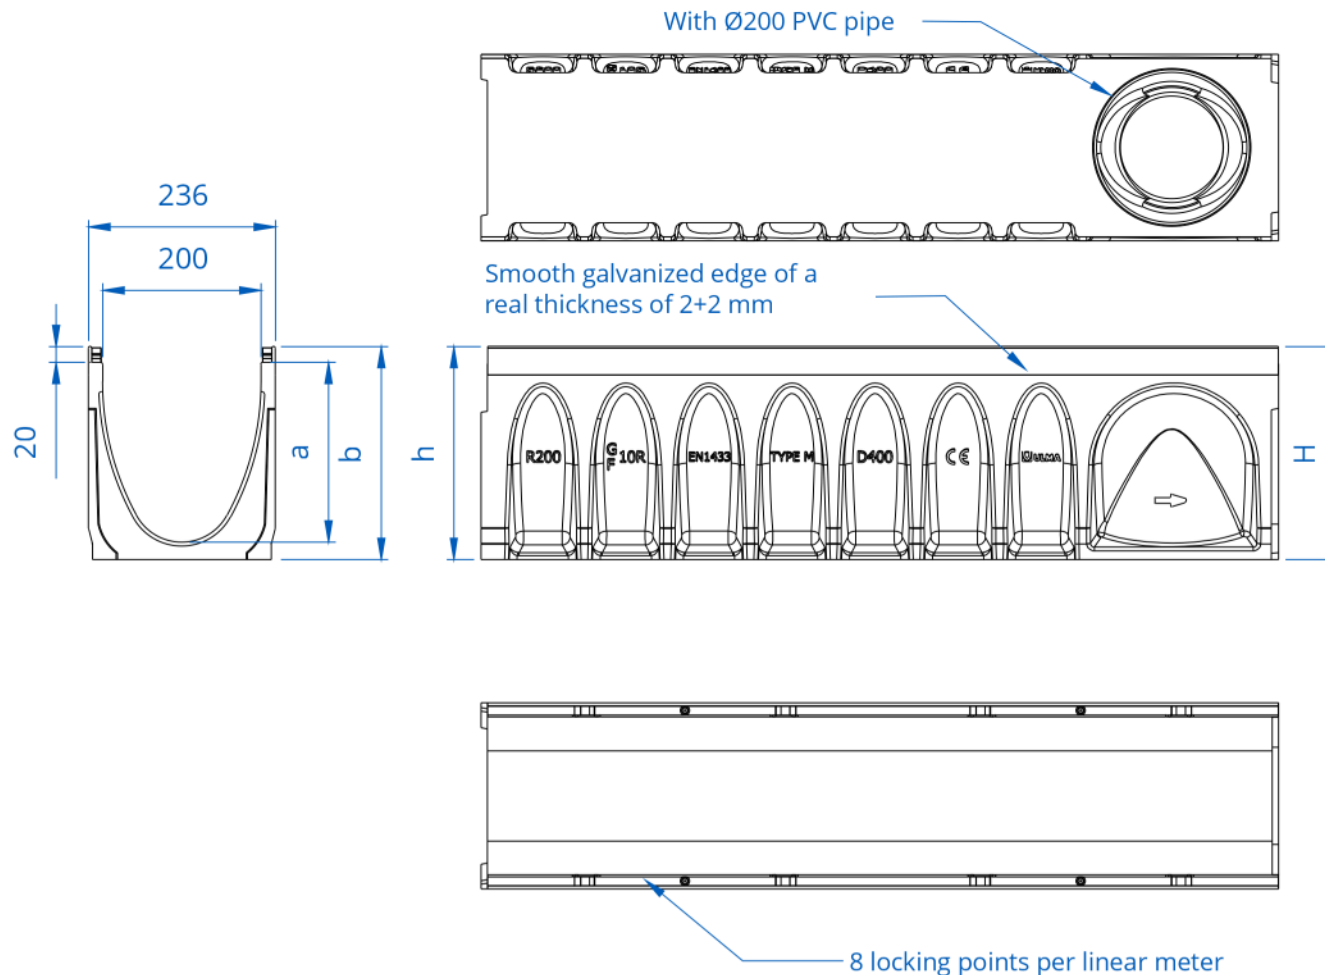

multiV+® R200F						
External width : 236mm Internal width : 200mm Length (L) : 1000mm						
Channel reference:	Total height		Internal height		Hydraulic section (cm²)	Ø outlet(mm)
	h (mm)	H (mm)	a (mm)	b (mm)		Vert. Horiz.
R200F00R	170	170	128	128	204	200 -
R200F00R	220	220	178	178	284	200 -
R200F01	220	225	178	183	294.5	200 -
R200F02	225	230	183	188	303	200 -
R200F03	230	235	188	193	311	200 -
R200F04	235	240	193	198	319	200 -
R200F05	240	245	198	203	327	200 -
R200F06	245	250	203	208	335.5	200 -
R200F07	250	255	208	213	343.5	200 -
R200F08	255	260	213	218	351.5	200 -
R200F09	260	265	218	223	360	200 -
R200F10	265	270	223	228	368	200 -
R200F10R	270	270	228	228	368	200 -
R200F11	270	275	228	233	388.5	200 -
R200F12	275	280	233	238	396	200 -
R200F13	280	285	238	243	404	200 -
R200F14	285	290	243	248	411.5	200 -
R200F15	290	295	248	253	419.5	200 -
R200F16	295	300	253	258	427	200 -
R200F17	300	305	258	263	435	200 -
R200F18	305	310	263	268	442.5	200 -
R200F19	310	315	268	273	450.5	200 -
R200F20	315	320	273	278	458	200 -
R200F20R	320	320	278	278	458	200 -
R200F30R	370	370	328	328	542	200 -

Review: 2021-02

ULMA Architectural Solutions reserves the right to modify the specifications of any of its products without prior notice.

Information about the shown products is only indicative and is based on the existing technical features at the time of issuing.

In the event of any discrepancy in the translation of this document into different languages, the Spanish version will be used.

Latest version in www.ulmaarchitectural.com

For more details, see technical sheets and installation guide.

Description

ULMA polymer concrete linear drainage channel model multiV+® R200F. Self-cleaning optimized V-shaped V+ section.

Protective galvanized steel edge with a real thickness of 2+2 mm, smooth, without breakage of the protective zinc layer, avoiding water accumulation and preventing corrosion.

8 point bolt-locked system per lm.

Load class up to D400, EN 1433 Standard.

Grooved to ease joint sealing and vertically and horizontally channel aligning tongue and groove.

CE Conformity Declaration and compliance with EN 1433 Standard.

External width 236 mm, internal width 200mm and total length 1000mm. Total heights available between 170mm and 370mm. Installation possible with no slope or stepped fall.



info@ulmaarchitectural.com
ulmaarchitectural.com