610-638-1221
sales@trenchdrain.com
PO BOX 377 - FREMONT, OH 43420

PROJECT ID:
CONTRACT NO: _____

LOCATION: _____

RELEASED: 4.7.23
REVISION: C


DG0643 | HUBBELL POLYCAST DUCTILE IRON SLOTTED GRATE

MATERIAL	WEIGHT	OPEN AREA	FLOWRATE
DUCTILE IRON	63.00 LBS.	28%	123.44 GPM PER LINEAR FOOT WITH 1/2" OF HEAD

DIN APPLICATION LOAD CLASS E:
SPECIAL AREAS WITH HEAVY WHEEL LOADS, E.G. AIRPORTS AND DOCKS. DESIGNED FOR DISTRIBUTED PRESSURE OF 202,320 LBS. (900kN)

MEETS THE FOLLOWING STANDARDS AND SPECIFICATIONS:
-AUSTRAILIAN STANDARD AS 3996-2006 CLAUSE 3.3.6

SYSTEM MFG	SYSTEM	LOCKING DEVICE
HUBBELL	POLYCAST 600 (651 CATCH BASIN)	INCLUDED
	POLYCAST 700 (751 CATCH BASIN)	
TDS	SS0500 (SS0651 CATCH BASIN)	LD600-CB
	SS0600 (SS0651 CATCH BASIN)	

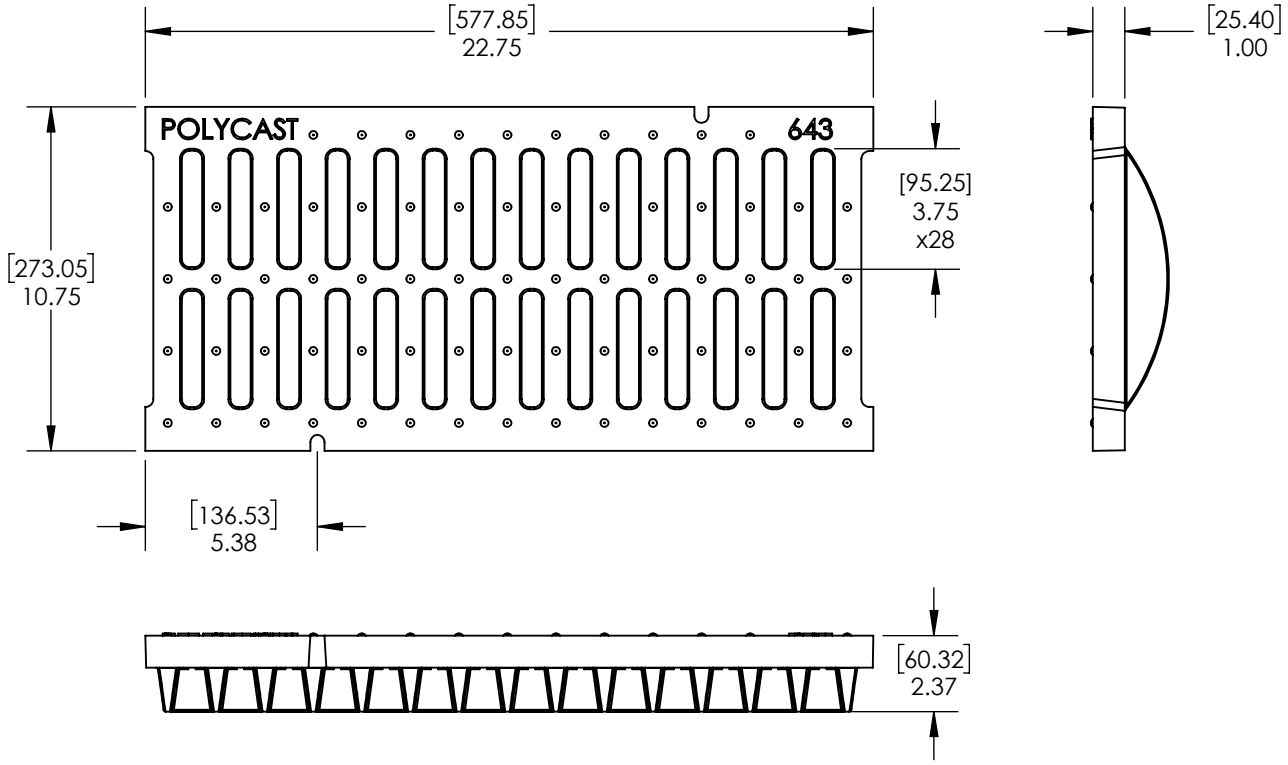

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTIBILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.