

DG1275 (FORMERLY FG1275)	TRENCHERA TRANSVERSE SLOTTED DUCTILE IRON GRATE 14.66"
------------------------------------	--




MATERIAL	WEIGHT	OPEN AREA	FLOWRATE
DUCTILE IRON	68.30 LBS.	19%	115.83 GPM PER LINEAR FOOT WITH 1/2" OF HEAD

DIN APPLICATION LOAD CLASS E:
 INDUSTRIAL AREAS, FORK TRUCKS, TRAFFIC PORTS AND DOCK SIDES. DESIGNED FOR A DISTRIBUTED PRESSURE OF 134,800 LBS. (600kN)

MEETS THE FOLLOWING STANDARDS AND SPECIFICATIONS:
 THE AMERICAN WITH DISABILITIES ACT OF 1990: 4.5.4

SYSTEM	INSTALLATION PACK
FP1200 (WELDED FRAME W/CROSSBARS)	HW FGS
1200 SERIES (TRENCHERA)	FA1442B
SS1200	SA1442B
SS SERIES (SS651 CATCH BASIN)	SA1442B

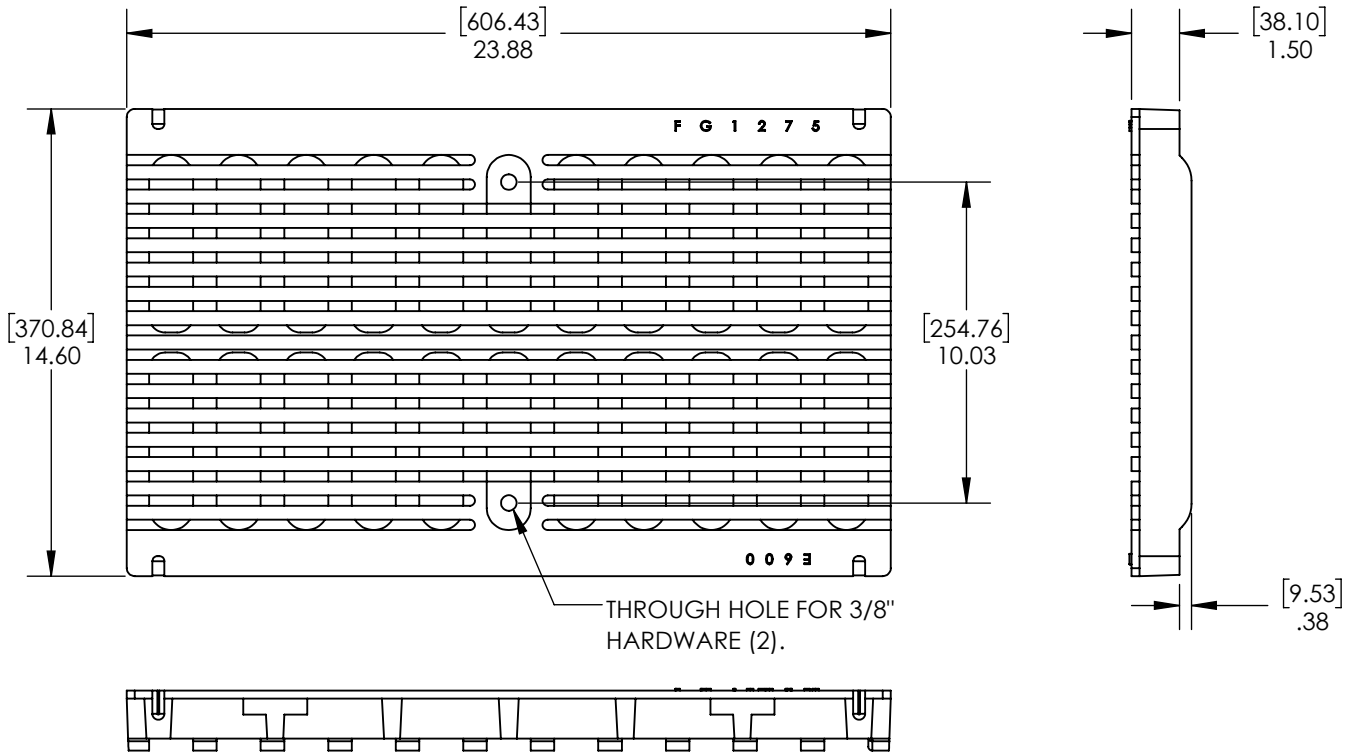

DISCLAIMER - The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.