

RELEASED: 6.4.24  
 REVISION: -

RG-151224-AB


TDS 12.00" X 24.00" SLOTTED GRATE

MATERIAL	WEIGHT	OPEN AREA	FLOWRATE
DUCTILE IRON 80-55-06	55 LBS.	34%	167.13 GPM PER LINEAR FOOT WITH 1/2" OF HEAD

**DIN APPLICATION LOAD CLASS D:**



HIGHWAY VEHICLE AND COMMERCIAL AIRCRAFT, LOW TO MODERATE SPEEDS. PARKING AREAS, DRIVEWAYS, AND WAREHOUSES. DESIGNED FOR A DISTRIBUTED PRESSURE OF 89,982 LBS. (400kN)

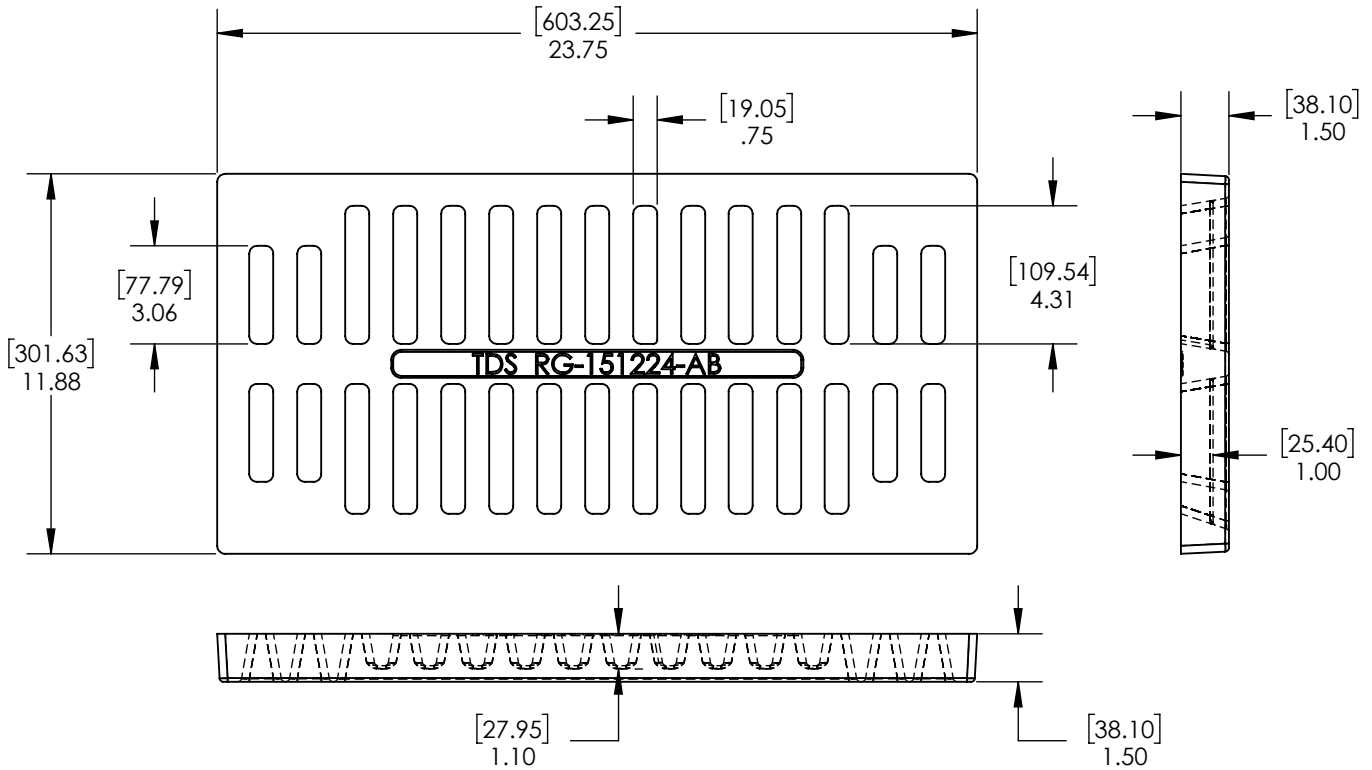

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.