


# M200

LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type M200: External width 260 mm; Internal width 200 mm and overall height 100 mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

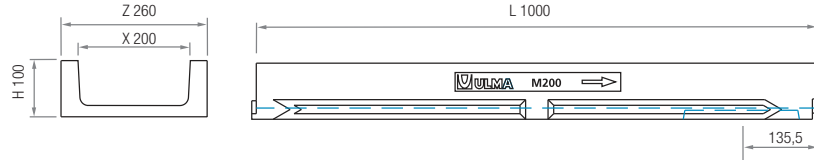

| Channel | L (mm) | H (mm) | Width (mm) |     | Ø Outlet* (mm) |      | Hydraul. Section (cm <sup>2</sup> ) | Pcs. / Pallet |
|---------|--------|--------|------------|-----|----------------|------|-------------------------------------|---------------|
|         |        |        | Z          | X   | Vert.          | Hor. |                                     |               |
| M200    | 1000   | 100    | 260        | 200 | 160            | -    | 157                                 | 49            |

\*Vert. outlets on order.

Slotted      Slotted      Normal & Heelproof Mesh




## GRATINGS

| Material         | Design         | Load | Code        | L (mm) | Width (mm) | Thickness (mm) | Opening (mm) | Units (x LM) |
|------------------|----------------|------|-------------|--------|------------|----------------|--------------|--------------|
| DUCTILE IRON     | SLOTTED        | C250 | FNX200UCCM  | 500    | 250        | 6              | 10           | 2            |
| GALVANIZED STEEL | SLOTTED        | A15  | GN200UCA    | 1000   | 250        | 3              | 8,5          | 1            |
|                  | MESH           | B125 | GEX200UCB33 | 1000   | 250        | 2,5            | 30 x 30      | 1            |
|                  | HEELPROOF MESH | B125 | GEHX200UCB  | 1000   | 250        | 2,5            | 30 x 10      | 1            |

## LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



## END CAPS

Closed



| Code   | Type   |
|--------|--------|
| T200MC | CLOSED |



trenchdrain.com

610-638-1221

Largest stocking distributor in the USA