


U250

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type U250: External width 310 mm; Internal width 250 mm, and overall height between 270 and 370 mm, to collect rainwater in 1 metre long units. Locking system consists of locking bar CS250 and screws.

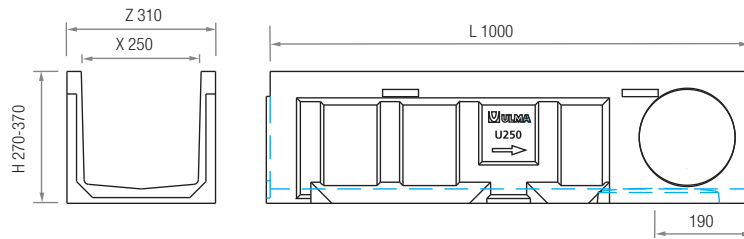

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U250.00R	1000	270	310	250	250	200	580	28
U250.10R	1000	320	310	250	250	200	706	21
U250.20R	1000	370	310	250	250	200	828	21

*Vert. and horiz. outlets on order.

Slotted

Mesh



GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x L.M)
DUCTILE IRON	SLOTTED	B125	FNX250UCBM	500	300	6	13,2	2
	SLOTTED	C250	FNX250UCCM	500	300	6	14	2
GALVANIZED STEEL	MESH	B125	GEX250UCB	1000	300	3	30 x 20	1

LOCKING SYSTEM

LOCKING BAR.

Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU250	500	375	310	160/200	-	1	-
AU250S + A250B	500	725*	310	160/200	-	2	C250

* The sump unit can be higher incorporating an intermediate unit.

END CAPS		Closed		Open	
Channel	Code	Type	Ø (mm)		
U250.00R	T250U00C	CLOSED	-		
	T250U00A	OPEN	200		
U250.10R	T250U10C	CLOSED	-		
	T250U10A	OPEN	200		
U250.20R	T250U20C	CLOSED	-		
	T250U20A	OPEN	200		

GALVANIZED STEEL BUCKET *

Code
C250



*Only applicable if 2 sump units are installed.

