


D100

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type D100: External width 155 mm; Internal width 100 mm; Available with overall heights between 140 mm and 235 mm. Suitable for cascaded type slope to collect rainwater in 1 metre long units. Locking system consists of locking bar CS100 and screws, with polymer concrete stepped edges for lateral protection.

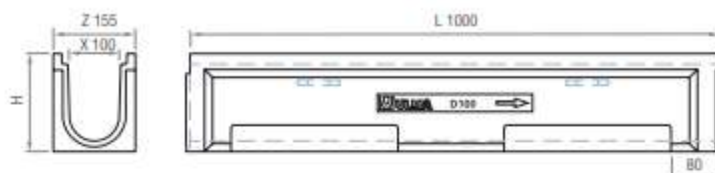

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
D100.00	1000	140	155	100	110	-	86	78
D100.05	1000	160	155	100	110	-	106	65
D100.10	1000	185	155	100	110	110	130	65
D100.15	1000	210	155	100	110	110	154	52
D100.20	1000	235	155	100	110	110	179	52

*Vert. and horiz. outlets on order.



GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX100KCCM	500	123	14	2
	HEELPROOF SLOTTED	C250	FNHX100KCCM	500	123	5	2
GALVANIZED STEEL	PERFORATED	A15	GP100KCA	1000	123	Ø 6	1
	SLOTTED	A15	GN100KCA	1000	123	9	1
	HEELPROOF MESH	B125	GEHX100KCB	1000	123	30 x 10	1
STAINLESS STEEL	SLOTTED	A15	IN100KCA	1000	123	7	1
	PERFORATED	A15	IP100KCA	1000	123	Ø 6	1
	MESH	B125	IX100KCB	1000	123	30 x 20	1
COMPOSITE	HEELPROOF SLOTTED	A15	PNH100KCAM-GRIS (1)	500	123	5	2
	MESH	B125	PE100KCBM	500	123	14 x 12,5	2

(1) Available in several colors.

LOCKING SYSTEM

LOCKING BAR.

Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AD100	500	560	155	110/160	90	1	CU100

END CAPS	
Code	Type
T100D00C	CLOSED
T100D05C	CLOSED
T100D10C	CLOSED
T100D15C	CLOSED
T100D20C	CLOSED




STEP UNITS	
Code	
CED100	



GALVANIZED STEEL BUCKET	
Code	
CU100	



SLOPE DESIGNS



WITHOUT SLOPE

CASCADED SLOPE

TDS
TRENCH DRAIN SYSTEMS
trenchdrain.com
610-638-1221

Largest stocking distributor in the US