


FG1241	TRENCHERA SLOTTED DUCTILE IRON GRATE 14.66"
--------	---



MATERIAL	WEIGHT	OPEN AREA	FLOWRATE
DUCTILE IRON	43.40 LBS.	61%	363.62 GPM PER LINEAR FOOT WITH 1/2" OF HEAD

DIN APPLICATION LOAD CLASS C:
 CURB SIDES, HIGHWAY SHOULDERS AND PARKING
 AREAS. DESIGNED FOR A DISTRIBUTED PRESSURE OF
 56,200 LBS. (250kN)

SYSTEM	INSTALLATION PACK
FP1200 (WELDED FRAME W/CROSSBARS)	HW FGDI
FF SERIES / FP1200 (TRENCHERA)	HWGRT-01

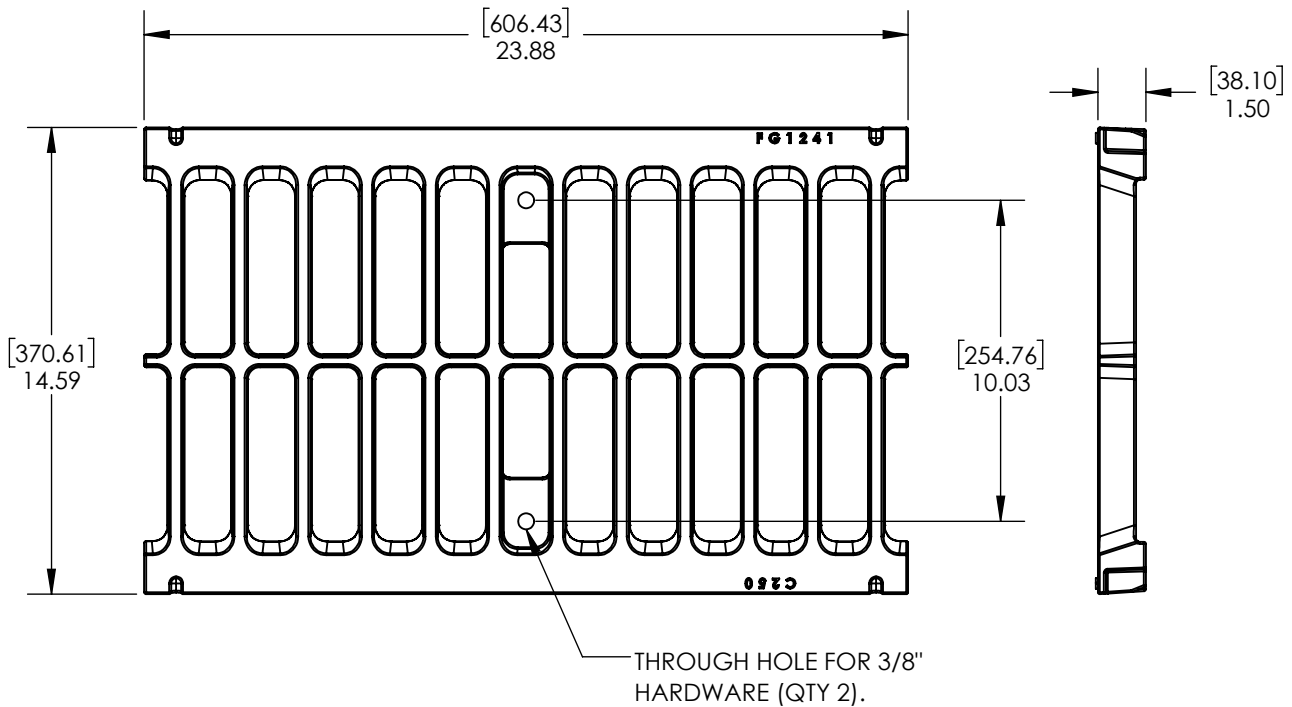

DISCLAIMER - The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.