## **SPECIFICATION:**

MEA - JOSAM 100C SERIES CHANNELS SHALL BE 39.4" (1000) LONG WITH 4" (102) INTERNAL WIDTH AND RADIUSED BOTTOM. INTERCONNECTING CHANNEL SECTIONS SHALL BE MADE OF SMC/GRP (SHEET MOLDING COMPOUND/GLASS REINFORCED POLYESTER) MATERIAL AND AVAILABLE WITH AND WITHOUT SLOPE. CHANNEL SUPPORT BRACKETS CAPABLE OF ACCEPTING RE-BAR, END OUTLETS, BOTTOM OUTLETS, ENDCAPS, AND CORNER/T CONNECTORS SHALL BE AVAILABLE. GRATE OPTIONS FOR LOADING CLASSES A-E WITH PRESSURE OR LOCKING BOLT SECURING DEVICES AND DUCTILE IRON RAIL TO PROTECT CHANNEL EDGES SHALL BE AVAILABLE.

PRO-PLUS
4" INTERNAL WIDTH


**SERIES** 

100C


PART NUMBER	DIM "A"	DIM "B"	WEIGHT (LBS)
100C	6.2	6.2	9.2
100C01	7.5	7.7	12.4
100C02	7.7	7.9	12.6
100C03	7.9	8.1	12.8
100C04	8.1	8.3	12.9
100C05	8.3	8.5	13.1
100C05N	8.5	8.5	13.3
100C06	8.5	8.7	13.4
100C07	8.7	8.9	13.6
100C08	8.9	9.1	13.8
100C09	9.1	9.3	14.0
100C10	9.3	9.5	14.2
100C11	9.5	9.7	17.1
100C12	9.7	9.9	17.3
100C13	9.9	10.1	17.5
100C14	10.1	10.3	17.6
100C15	10.3	10.5	17.8
100C15N	10.5	10.5	18.0
100C16	10.5	10.7	18.1
100C17	10.7	10.9	18.3
100C18	10.9	11.1	18.5
100C19	11.1	11.3	18.7
100C20	11.3	11.5	18.9

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR

USE OF SUPERSEDED OR VOID DATA.

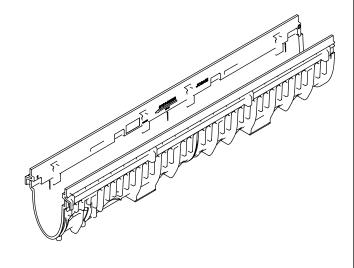

□ NOTE: ADD 1.2" WHEN FURNISHED WITH DI FRAME 152431

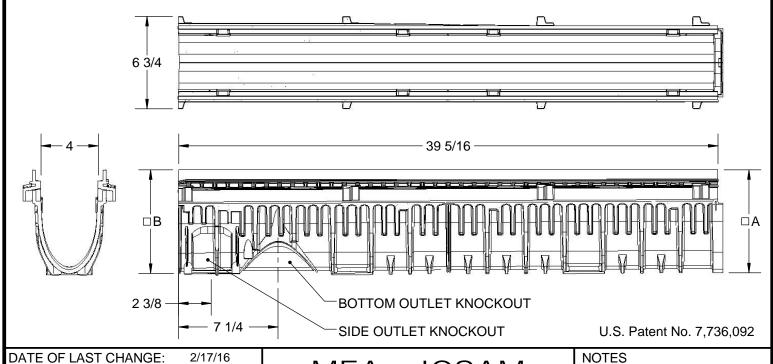

MEA - JOSAM

MICHIGAN CITY, INDIANA

## **SPECIFICATION:**

MEA-JOSAM 140150 SLOTTED DUCTILE IRON GRATE WITH STARFIX SECURING FEATURE AND CLASS D LOAD RATING (90,000 LBS. - 1,859 PSI).

**GRATE** STARFIX

**SERIES** 

140150

**SLOT SIZE - 3.8 X .5** 

