FFAS 65 Series


ID Infinity Drain

FFAS 65 Fixed Length

- 12 gauge 316 Stainless Steel grate
- 16 gauge 304 Stainless Steel channel
- Pre-pitched channel with "Fixed" lengths and "Fixed" center vertical (down) outlet location
- Not site sizeable
- Indoor or outdoor use
- Bonded "Flange" installation for flush against the wall.
- Lowest height for curbless installations
- Uses Liquid and Fabric Sheet Membrane waterproofing
- Grate can be removed completely for cleaning
- Flow rate 9 GPM per outlet*
 *Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.



Installation (FF) Fixed Flange

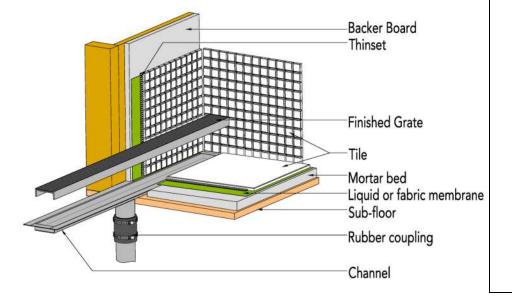

Complete Kits:

FFAS 6524 24" Complete Kit FFAS 6532 32" Complete Kit FFAS 6536 36" Complete Kit FFAS 6542 42" Complete Kit FFAS 6548 48" Complete Kit FFAS 6560 60" Complete Kit


Components:

SA 6524 24" Stainless Steel Grate
SA 6532 32" Stainless Steel Grate
SA 6536 36" Stainless Steel Grate
SA 6542 42" Stainless Steel Grate
SA 6548 48" Stainless Steel Grate
SA 6560 60" Stainless Steel Grate
FC 6524 24" Stainless Steel Fixed Channel
FC 6536 36" Stainless Steel Fixed Channel
FC 6542 42" Stainless Steel Fixed Channel
FC 6544 48" Stainless Steel Fixed Channel
FC 6546 60" Stainless Steel Fixed Channel
FC 6560 60" Stainless Steel Fixed Channel

Infinity Drain

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com








Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FFAS 6536 Specifications



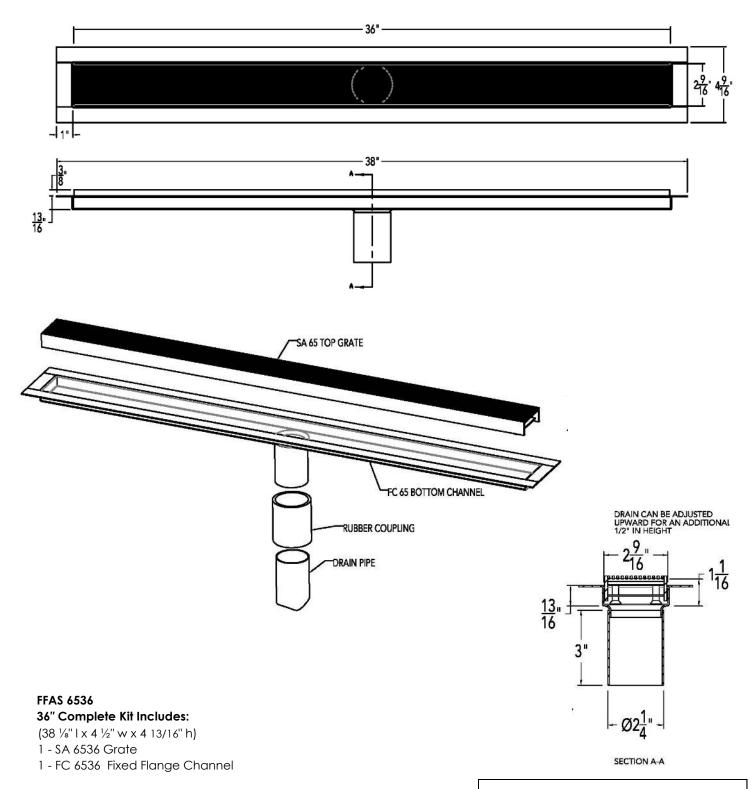

Infinity Drain

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com



CANADA - CSA B 125.2 USA - ASME A112.18.2



Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Page 2 of 2