

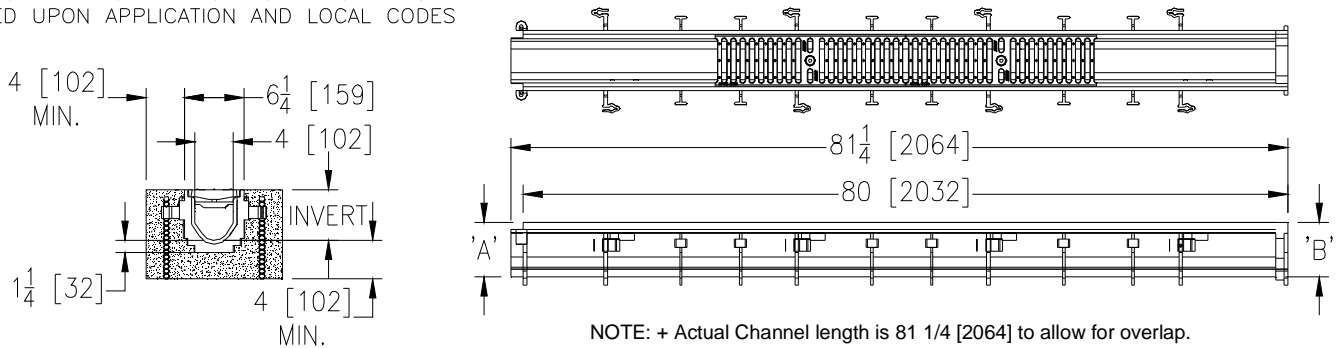
**Z886**

SPECIFICATION SHEET

**6-1/4 [159] WIDE REVEAL TRENCH DRAIN SYSTEM**

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR  
CONCRETE ENCASEMENT AND REINFORCING  
BASED UPON APPLICATION AND LOCAL CODES

NOTE: + Actual Channel length is 81 1/4 [2064] to allow for overlap.

**ENGINEERING SPECIFICATION:** Zurn Z886 Channels shall be 80 [2032] long, 6-1/4 [159] wide reveal and have a 4 [102] throat. Modular channel sections shall be made of 0% water absorbent High Density Polyethylene (HDPE). Shall have a positive mechanical connection between channel sections that will not separate during the installation and shall mechanically lock into the concrete surround a minimum of every 10 [254]. Channels shall weigh less than 2.31 lbs.[1.05kg] per linear foot, have a smooth, 1-1/2 [38] radiused self cleaning bottom with a Manning's coefficient of 0.009 and 0.75% or neutral 0% built in slope. Channels shall have rebar clips standard to secure trench in its final location. Shall be provided with standard DGC grates that lock down with lockdown bars to the channel and is not intended for dynamic traffic loadings. Zurn 5 3/8 [137] wide reveal Ductile Iron Slotted Grate conforming to ASTM specification A536-84, Grade 80-55-06. Ductile Iron grate is rated class C per the DIN EN1433 top load classifications. Supplied in 20 [508] nominal lengths with 1/2 [13] wide slots, and 3/4 [19] bearing depth. Grate has an open area of 18.57 sq. in per ft. [39,307 sq. mm per meter].

**PREFIX OPTIONS (Check/specify appropriate options)**

\_\_\_ Z Six-foot, Eight-inch High Density Polyethylene (HDPE)\*

**SUFFIX OPTIONS (Check/specify appropriate options)****Outlet Adapters Add/Each**

- |                                   |                                      |
|-----------------------------------|--------------------------------------|
| ___ -E1 Closed End Cap            | ___ -U2 2 [51] No-Hub Bottom Outlet  |
| ___ -E2 2 [51] No-Hub End Outlet  | ___ -U3 3 [76] No-Hub Bottom Outlet  |
| ___ -E3 3 [76] No-Hub End Outlet  | ___ -U4 4 [102] No-Hub Bottom Outlet |
| ___ -E4 4 [102] No-Hub End Outlet | ___ -U6 6 [152] No-Hub Bottom Outlet |
| ___ -E6 6 [152] No-Hub End Outlet |                                      |

**Frame Options**

- |  |
|--|
| ___ -AVB Aluminum Veneer Bronze Anodized Frame     |
| ___ -SVF Type 304 Stainless Steel Top Veneer Frame |
| ___ -SW Sidewall Extension - 9 [229] High          |
| ___ -SW2 Sidewall Extension - 18 [457] High        |

**Grate Options (Load Classifications are per DIN EN1433)**

- |  |
|--|
| ___ -BDC Black Acid Resistant Epoxy Coated Ductile Grate - Class C |
| ___ -BG Galvanized Ductile Iron Bar Grate - Class C                |
| ___ -DBG Ductile Iron Cast Bar Grate - Class C                     |
| ___ -DC Ductile Iron Solid Cover - Class C                         |
| ___ -DGC Ductile Iron Slotted Grate - Class C *                    |
| ___ -GDC Galvanized Ductile Slotted Grate - Class C                |
| ___ -GG Fiberglass Grate - Class A                                 |
| ___ -GHPD Galvanized Heel-Proof Ductile Grate - Class C            |
| ___ -HPD Heel-Proof Ductile Slotted Grate - Class B                |
| ___ -HPP Heel-Proof Polyethylene Grate - Class A                   |
| ___ -RFG Reinforced Galvanized Steel Slotted Grate - Class B       |
| ___ -RFS Reinforced Stainless Steel Slotted Grate - Class B        |
| ___ -RPG Reinforced Galvanized Perforated Grate - Class B          |
| ___ -RPS Reinforced Stainless Steel Perforated Grate - Class B     |

**Miscellaneous Options**

- |                               |
|-------------------------------|
| ___ -VP Vandal-Proof Lockdown |
| ___ -JC Joint Connector       |

**MADE in the U.S.A. (Load Classifications are per DIN EN1433)**

- |  |
|--|
| ___ -AWG Aluminum Wire Grate - Class A                               |
| ___ -DGC-USA Ductile Iron Slotted Grate-Class C (Substitute DGE-USA) |
| ___ -FG Fabricated Galvanized Steel Slotted Grate - Class A          |
| ___ -FS Fabricated Stainless Steel Slotted Grate - Class A           |
| ___ -GDC-USA Galvanized Ductile Slotted Grate - Class C              |
| ___ -GG Fiberglass Grate - Class A                                   |
| ___ -PG Perforated Galvanized Steel Grate - Class A                  |
| ___ -PS Perforated Stainless Steel Grate - Class A                   |
| ___ -SBG-L Stainless Steel Bar Grate - Class B                       |

**Miscellaneous Options**

- |                              |
|------------------------------|
| ___ -DB Bottom Dome Strainer |
|------------------------------|

Trench No.	'A'		'B'		Flow		
	Shallow Inv.	Deep Inv.	Shallow Inv.	Deep Inv.	(cfs)	(gpm)	(lps)
8601	3.50 [89]	4.10 [104]	4.10 [104]	4.70 [119]	0.21	93	6
8602	4.10 [104]	4.70 [119]	4.70 [119]	5.30 [135]	0.27	122	8
8603	4.70 [119]	5.30 [135]	5.30 [135]	5.90 [150]	0.34	152	10
8603N	5.30 [135]	5.90 [150]	5.90 [150]	6.50 [165]	-	-	-
8604	5.30 [135]	5.90 [150]	5.90 [150]	6.50 [165]	0.41	183	12
8605	5.90 [150]	6.50 [165]	6.50 [165]	7.10 [180]	0.48	214	13
8606	6.50 [165]	7.10 [180]	7.10 [180]	7.70 [196]	0.55	245	15
8606N	7.10 [180]	7.70 [196]	7.70 [196]	8.30 [211]	-	-	-
8607	7.10 [180]	7.70 [196]	7.70 [196]	8.30 [211]	0.62	276	17
8608	7.70 [196]	8.30 [211]	8.30 [211]	8.90 [226]	0.69	308	19
8609	8.30 [211]	8.90 [226]	8.90 [226]	9.50 [241]	0.76	339	21
8610	8.90 [226]	9.50 [241]	9.50 [241]	10.10 [257]	0.83	371	23
8611	9.50 [241]	10.10 [257]	10.10 [257]	10.70 [272]	0.90	403	25
8612	10.10 [257]	10.70 [272]	10.70 [272]	11.30 [287]	0.97	435	27
8612N	10.70 [272]	11.30 [287]	11.30 [287]	11.90 [302]	-	-	-
8613	10.70 [272]	11.30 [287]	11.30 [287]	11.90 [302]	1.04	467	29
8614	11.30 [287]	11.90 [302]	11.90 [302]	12.50 [318]	1.11	498	31
8615	11.90 [302]	12.50 [318]	12.50 [318]		1.18	530	33

**Decorative Grate Options (Load Classifications are per DIN EN1433)**

- |  |
|--|
| ___ -BCD Bronze Circular Decorative Grate - Class A          |
| ___ -BDD Bronze Diagonal Decorative Grate - Class A          |
| ___ -DCD Ductile Iron Circular Decorative Grate - Class C    |
| ___ -DDD Ductile Iron Diagonal Decorative Grate - Class A    |
| ___ -DOG Ductile Iron Decorative Grate - Class A             |
| ___ -DWV Ductile Wave Decorative Grate - Class A             |
| ___ -GMG Galvanized Steel Mesh Grate - Class A               |
| ___ -HPB Heel-Proof Bronze Slotted Grate - Class A           |
| ___ -HPS Heel-Proof Stainless Steel Slotted Grate - Class A  |
| ___ -SCD Stainless Steel Circular Decorative Grate - Class B |
| ___ -SDD Stainless Steel Diagonal Decorative Grate - Class B |
| ___ -SMG Stainless Steel Steel Mesh Grate - Class A          |
| ___ -SOG Stainless Steel Decorative Grate - Class B          |

**Decorative MADE in the U.S.A. (Load Classifications are per DIN EN1433)**

- |  |
|--|
| ___ -BZ Bronze Decorative Grate - Class A                  |
| ___ -NBZ Nickel Bronze Decorative Grate - Class A          |
| ___ -PSR Perforated Stainless Steel Raised Grate - Class A |
| ___ -SWG Stainless Steel Wire Grate - Class A              |

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. T DATE: 3/22/11 C.N. NO. 121052

DWG. NO. 60355 PRODUCT NO. Z886

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292