


GN100KCC

LOAD CLASS **C250** EN-1433 STANDARD




GALVANIZED STEEL SLOTTED

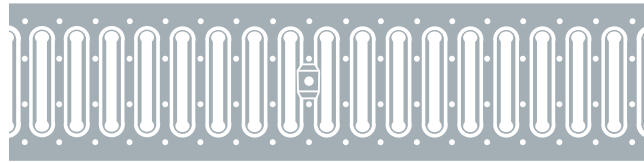

PRODUCT FEATURES

- Non-slip slotted grating reference GN100KCC
- Continuous hot-dip galvanized and cold rolled steel, UNE-EN 10346 Standard
- Load class C250, EN 1433 Standard
- 2 point locking bar system per lm
- Non-slip ridges over the entire surface.
- Water catchment surface: 282 cm²/lm
- Suitable for use with SELFK, M100K and U100K channels
- Complies with ADA - American Disabilities Act of 1990 Section 4.5.4.

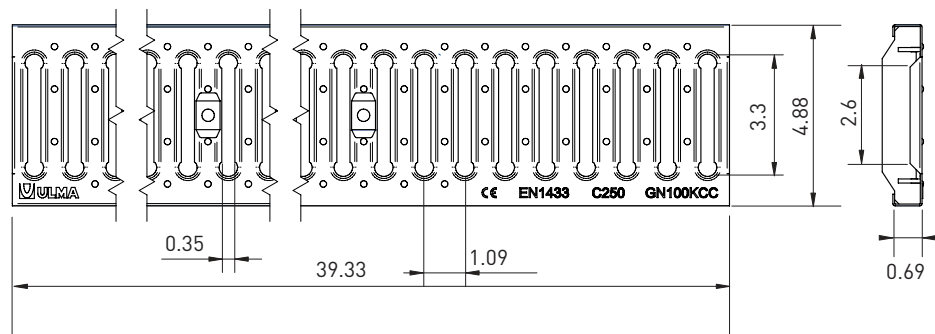

Slotted



Material	Design	Load	Code	L (inches)	Width (inches)	Units (x lm)
GALVANIZED STEEL	SLOTTED	C250	GN100KCC	39.33	4.88	1

LOCKING SYSTEM

LOCKING BAR. Two locking bars and two screws per linear metre.

