


M200

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M200: External width 260 mm; Internal width 200 mm and overall height 100 mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

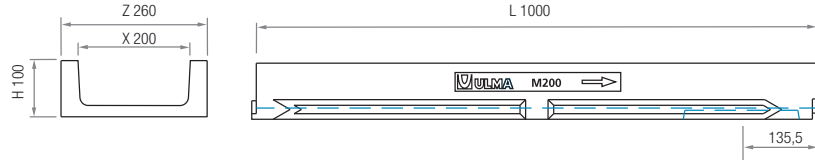

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M200	1000	100	260	200	160	-	157	49

*Vert. outlets on order.




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200UCCM	500	250	6	10	2
GALVANIZED STEEL	SLOTTED	A15	GN200UCA	1000	250	3	8,5	1
	MESH	B125	GEX200UCB33	1000	250	2,5	30 x 30	1
	HEELPROOF MESH	B125	GEHX200UCB	1000	250	2,5	30 x 10	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



Code	Type
T200MC	CLOSED



trenchdrain.com

610-638-1221

Largest stocking distributor in the USA