


M300

LOAD CLASS
UP TO B125
EN-1433 STANDARD

ULMA Linear Drainage Channel type M300: External width 360mm; Internal width 300mm and overall height 125mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS300 and screws.

MINI

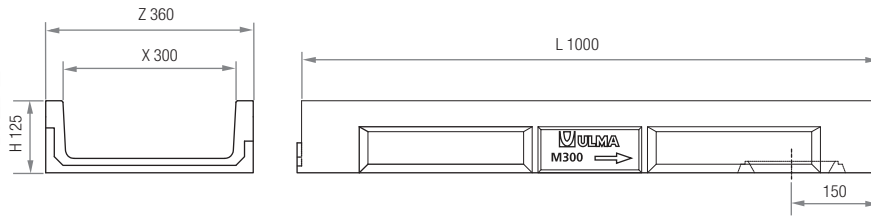

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M300	1000	125	360	300	200	-	294	30

*Vert. outlets on order.

Mesh



GRATING

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x LM)
GALVANIZED STEEL	MESH	B125	GEX300UCB	1000	360	3	1

LOCKING SYSTEM

LOCKING BAR. Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

AU300

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU300	500	365	360	200	-	1	C300

END CAPS

Closed



Code	Type
T300MC	CLOSED

GALVANIZED STEEL BUCKET

Code

C300



TDS
TRENCH DRAIN SYSTEMS
trenchdrain.com

610-638-1221

Largest stocking distributor in the USA