




P6-HPDE

6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in²/[mm²], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	34	94454	P6-HPDE

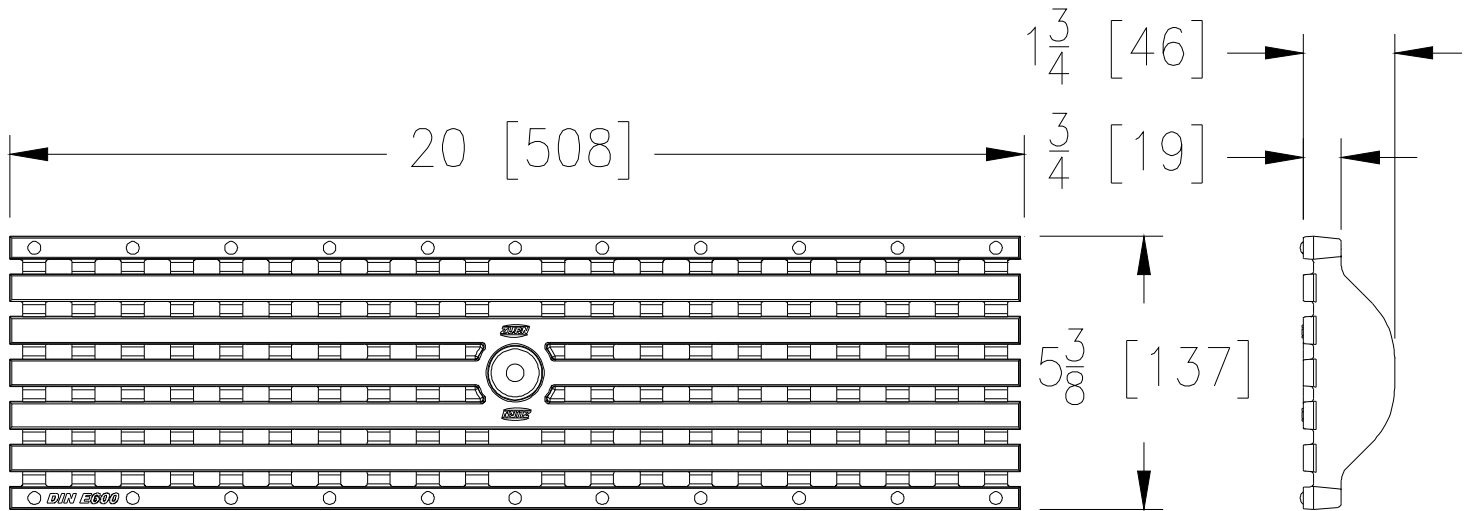

HPDE GRATE ENGINEERING SPECIFICATION: ZURN P6-HPDE

20" [508mm] X 5-3/8" [137mm] Ductile Iron heel-proof slotted grate weighing 9.5 lbs per linear foot [14.1kg/m]. The grate has an open area of 10.9 in² per linear foot [235cm²/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.

HPDE - Heel-Proof Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	9.5 lbs/ft. [14.1kg/m]
Open Area:	10.9 in ² /ft. [235cm ² /m]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	Yes