


Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (lbs[kg]).

Please	Item	Part	Item
Check	No.	Number	I.D.
✓			
	44	64078	P6-PS

Back to Index

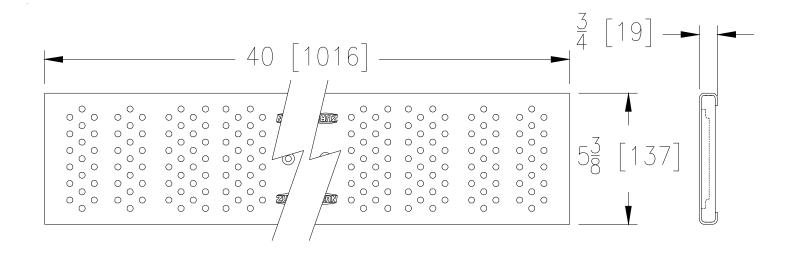

PS GRATE ENGINEERING SPECIFICATION: ZURN P6-PS

40 [1016] X 5-3/8 [137] Stainless steel perforated plastic grate weighing 1.8 lbs [.82 kg] per linear foot. The grate has an open area of 5.3 in² [34.2 cm²] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A240 Type 304 (or 316 by request).



www.zurn.com

PS - Fabricated Perforated			
Material: Type 304 Stainless Steel			
DIN Rating: Class A			
Weight:1.8 lbs/ft. [.82 kg]			
Open Area: 5.3 in ² /ft. [34.2 cm ²]			
ANSI Rating: Light-Duty			
Application: Heel-Proof Pedestrian			
Slot Width/Hole Size:1/4 [6.4]			
ADA: Yes			
H-20: No			
FAA: No			

Page 44 of 70

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | **Zurn Industries Limited** 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

-405-6272, Fax 905-405-1292

Rev. AK Date: 09/26/14 C.N. No. 131655 Form Number: FT641