

POLYCAST!

DG0644





600 Series
Fiberglass

PROJECT ID/
CONTRACT NO: _____

LOCATION: _____

ENGINEERING SPECIFICATION:

POLYCAST® DG0644 Grate is designed for use with POLYCAST® Vinyl Ester trench in areas requiring extreme chemical resistance. The clear opening between the bars is 5/8" [16mm]. Grating locking device Part No. DA0642F (not shown) should be used and maintained secure. The grate has 46% (114 in²) of open area. The grate weighs approximately 5lbs [2.27kg] and is available in both 24" [610mm] and 48" [1219mm] lengths.

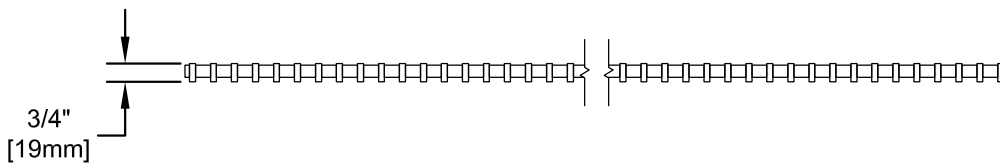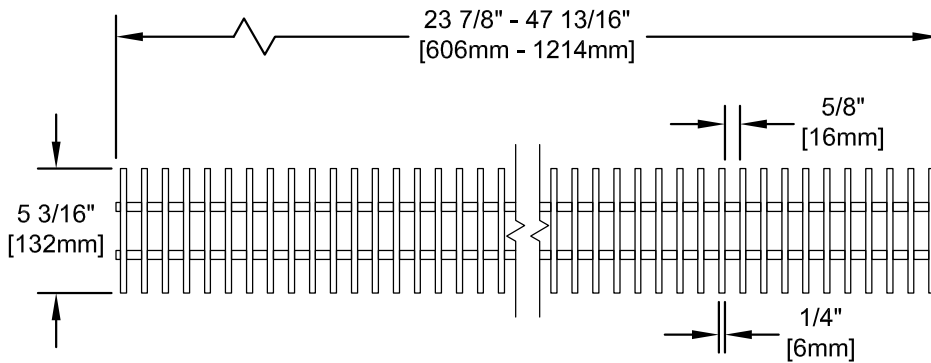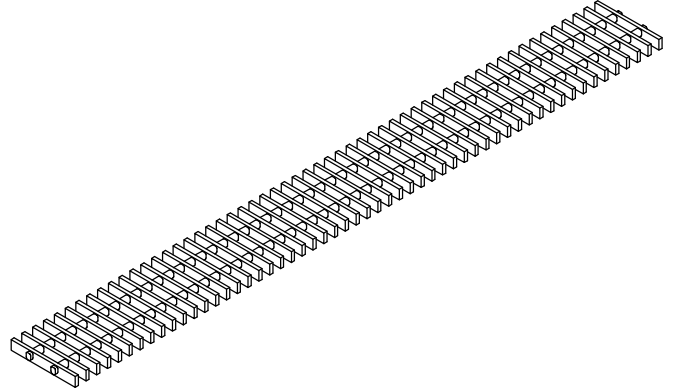

APPLICATION LOAD CLASS C:

Pneumatic tire vehicles, highway vehicles and low to moderate speeds (parking areas and driveways). Designed for a distributed pressure of 260psi (37,440psf).



LENOIR CITY, INC.
www.polycastrain.com
Toll Free Number:
1-800-346-3061

PC-52
12/4/2008