

# POLYCAST<sup>®</sup>

## DG0644SP



600 Series  
Fiberglass

PROJECT ID/  
CONTRACT NO: \_\_\_\_\_

LOCATION: \_\_\_\_\_

### ENGINEERING SPECIFICATION:

POLYCAST<sup>®</sup> DG0644SP Grate is designed for use with POLYCAST<sup>®</sup> Vinyl Ester trench in areas requiring extreme chemical resistance. The clear opening between the bars is 3/8" [10mm]. Grating locking device Part No. DA0642F (not shown) should be used and maintained secure. The grate has 39% (96 in<sup>2</sup>) of open area. The grate weighs approximately 6lbs [2.72kg] and is available in both 24" [610mm] and 48" [1219mm] lengths.

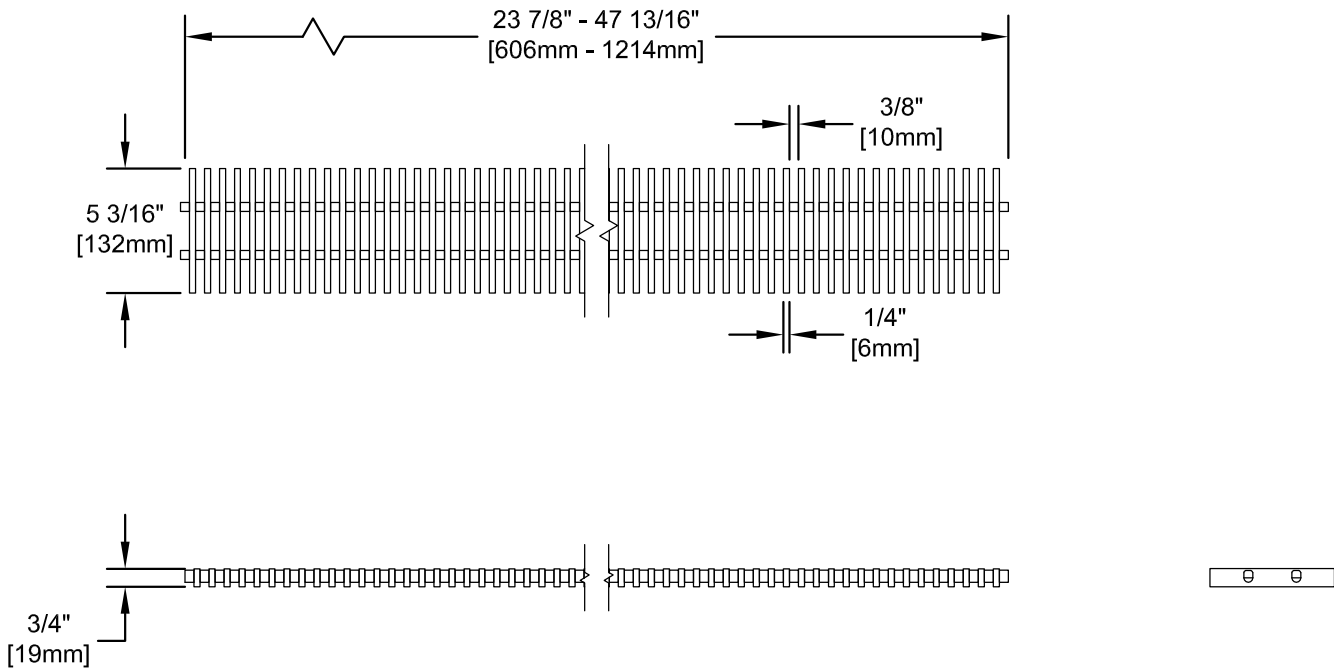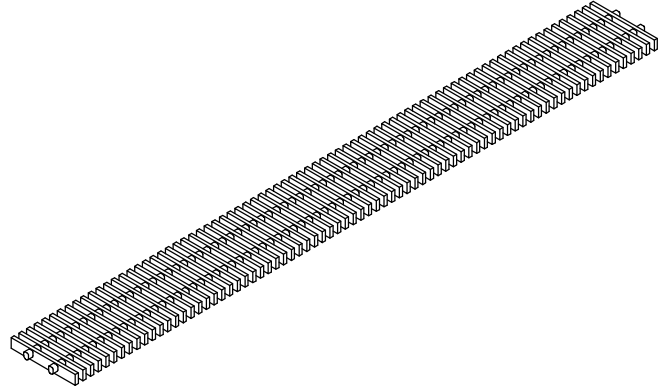

### APPLICATION LOAD CLASS C:

Pneumatic tire vehicles, highway vehicles and low to moderate speeds (parking areas and driveways). Designed for a distributed pressure of 260psi (37,440psf).



**LENOIR CITY, INC.**  
www.polycastdrain.com  
Toll Free Number:  
1-800-346-3061