


| | |
|----------|--|
| LD100X-2 | LOCKING DEVICE FOR ULMA U100, D100 & HYDROPLUS w/STEEL GRATE |
|----------|--|

| GRATE TYPE | PART NO. | | EN-1433 LOAD CLASS |
|--|-----------------|----------------|-----------------------|
| | 0.5M | 1M | |
| STAINLESS STEEL PERFORATED | 441 (IP100KCAM) | 440 (IP100KCA) | A15 |
| STAINLESS STEEL SLOTTED | 451 (IN100KCAM) | 450 (IN100KCA) | A15 |
| STAINLESS STEEL SLOTTED REINFORCED | 455 (IN100KCCM) | 454 (IN100KCC) | C250 |
| GALVANIZED STEEL PERFORATED WITH TREAD | N/A | 410 (GP100KCA) | A15 |
| GALVANIZED STEEL SLOTTED | 421 (GN100KCAM) | 420 (GN100KCA) | A15 |
| GALVANIZED STEEL SLOTTED REINFORCED | 425 (GN100KCCM) | 424 (GN100KCC) | C250 |

| GRATE TYPE | FINISH (ALL GRATES ARE 0.5M) | | EN-1433 LOAD CLASS |
|--|------------------------------|--------------------|-----------------------|
| | NATURAL | BAKED ON OIL | |
| IRONAGE - DYNAMO - DYA5-20I21 | IA-DYN-0520 | IA-DYN-0520-BF | B |
| IRONAGE - INTERLAKEN - IA5-20I21 | IA-INTER-0520 | IA-INTER-0520-BF | B |
| IRONAGE - JOE - RJA5-20I21 | IA-JOE-0520 | IA-JOE-0520-BF | B |
| IRONAGE - RAIN HEEL PROOF - RNA5-19I21HP | IA-RAIN-0520-HP | IA-RAIN-0520-HP-BF | B |

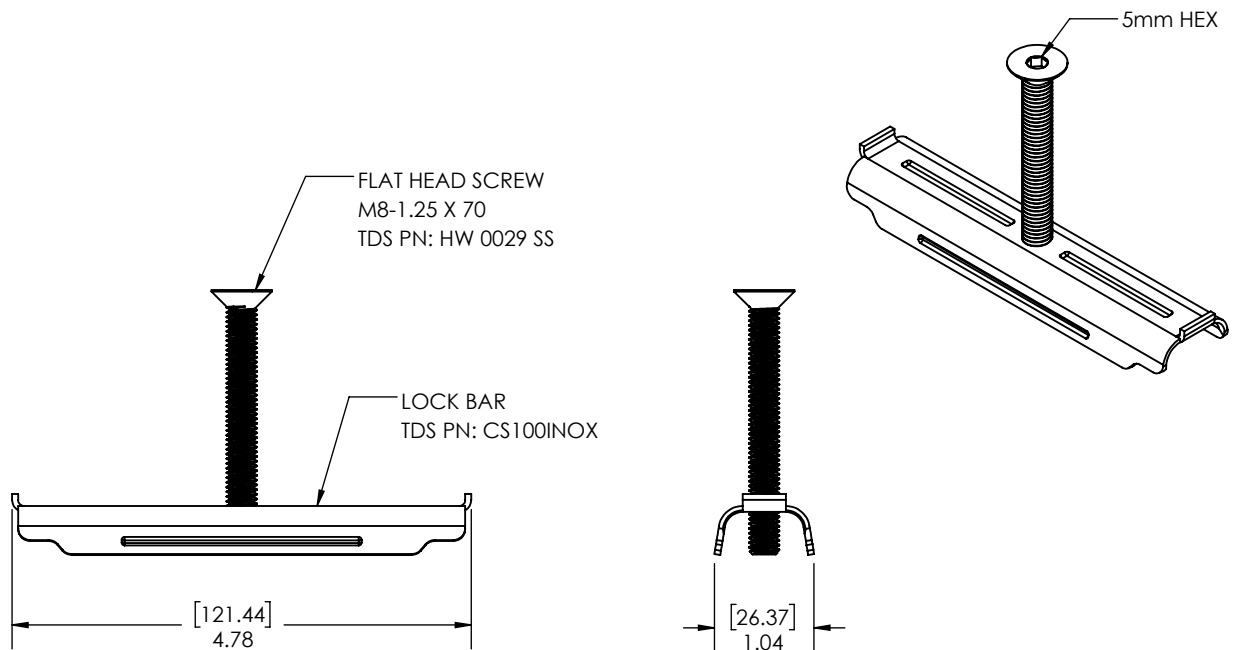

MANUFACTURER



DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

ENGINEERING SPECIFICATION

ULMA LD100X-2 SERIES LOCKING DEVICES ARE TO BE USED WITH ALL GRATING SYSTEMS WHERE WHEEL TRAFFIC OCCURS. THIS IS NECESSARY TO PROVIDE SYSTEM INTEGRITY. USED ON ULMA U100, D100 AND HYDROPLUS SYSTEMS.