


Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (lbs[kg]).

Please	Item	Part	Item
Check	No.	Number	I.D.
✓			
	28	58524	P6-GHPD

Back to Index

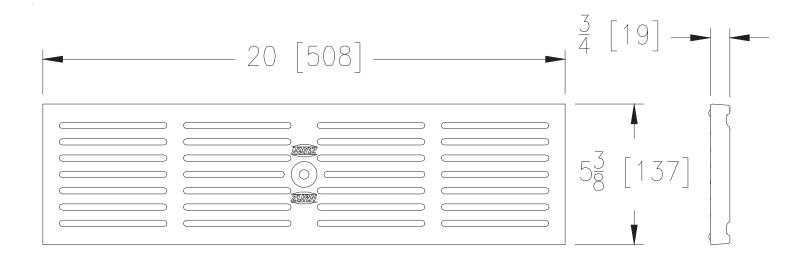

GHPD GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPD

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron heel-proof slotted grate weighing 6.3 lbs per linear foot [9.5kg/m]. The grate has an open area of 17.0 in² per linear foot [361cm²/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant* and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

GHPD - Heel-Proof Slotted			
Material: Galvanized Ductile Iron			
DIN Rating: Class B			
Weight: 6.3 lbs/ft. [9.5kg/m]			
Open Area: 17.0 in ² /ft. [361cm ² /m]			
ANSI Rating: Medium-Duty			
Application: Heel-Proof			
Slot Width/Hole Size:1/4" [6.4mm]			
ADA: Yes*			
H-20: No			
FAA: No			

^{*} Elongated openings must be placed perpendicular to the dominant direction of travel.

Page 28 of 70

ΑL

Date: 04/16/15

Rev.