


Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (lbs[kg]).

Please	Item	Part	Item
Check	No.	Number	I.D.
✓			
	37	58524	P6-HPS

Back to Index

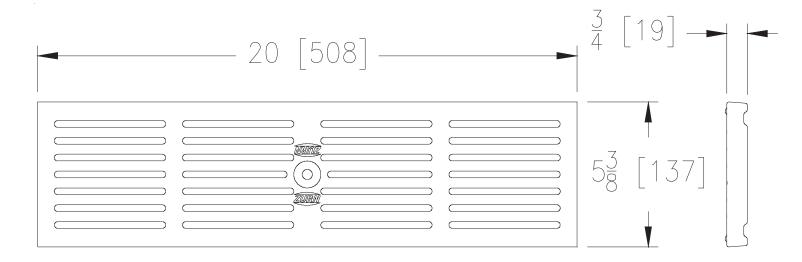

HPS GRATE ENGINEERING SPECIFICATION: ZURN P6-HPS

20" [508mm] X 5-3/8" [137mm] Stainless Steel heel-proof slotted grate weighing 7.1 lbs per linear foot [10.5kg/m]. The grate has an open area of 17.0 in² per linear foot [361cm²/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant*, and ASTM A351 Grade CF8 (TYPE 304) and Grade CF8M (TYPE 316).

HPS - Heel-Proof Slotted			
Material: Stainless Steel			
DIN Rating: Class A			
Weight: 7.1 lbs/ft. [10.5kg/m]			
Open Area: 17.0 in ² /ft. [361cm ² /m]			
ANSI Rating: Light-Duty			
Application: Heel-Proof, Pedestrian			
Slot Width/Hole Size: 1/4" [6.4mm]			
ADA: Yes*			
H-20: No			
FAA: No			

^{*} Elongated openings must be placed perpendicular to the dominant direction of travel.

Page 37 of 70

Rev. AL
Date: 04/16/15
C.N. No. 132548
Form Number: FT641