

DG0670-DG0670G

HUBBELL POLYCAST DURAGUARD SLOTTED GRATE





PART NO.	MATERIAL	COLOR	WEIGHT	OPEN AREA	FLOW RATE
DG0670	HDPE	BLACK	4 LBS.	18%	38.17 GPM PER LINEAR FOOT WITH 1/2" OF HEAD
DG0670G		GRAY			

DIN APPLICATION LOAD CLASS B: SIDEWALKS, PARKING LOTS, AND CAR PARKING DECKS. DESIGNED FOR A DISTRIBUTED PRESSURE OF 28,100 LBS. (125kN)


MEETS THE FOLLOWING STANDARDS & SPECIFICATION:

-THE AMERICANS WITH DISABILITIES ACT OF 1990: 4.5.4.

SYSTEM MFG	SYSTEM	LOCKING DEVICE
HUBBELL	POLYCAST 500	DA0542S
	POLYCAST 600	DA0642S
TDS	SS0500	SS0542S
	SS0600	SS0642S

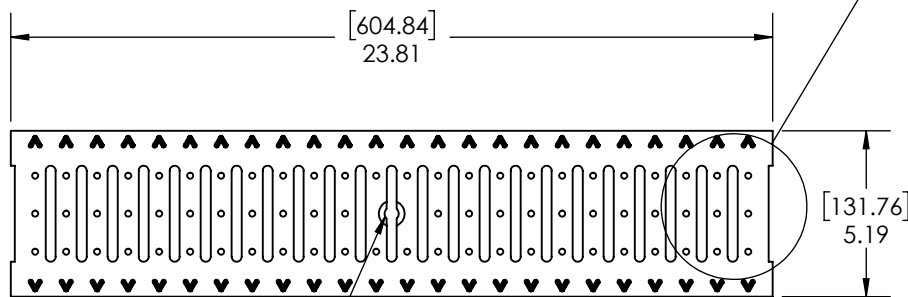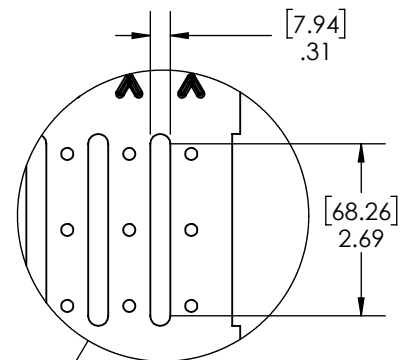

COUNTER-SUNK THRU HOLE FOR 3/8" HARDWARE.



DISCLAIMER - The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.