


Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (Ibs[kg]).

Please	Item	Part	Item
Check	No.	Number	I.D.
✓			
	21	64063	P6-FG

Back to Index

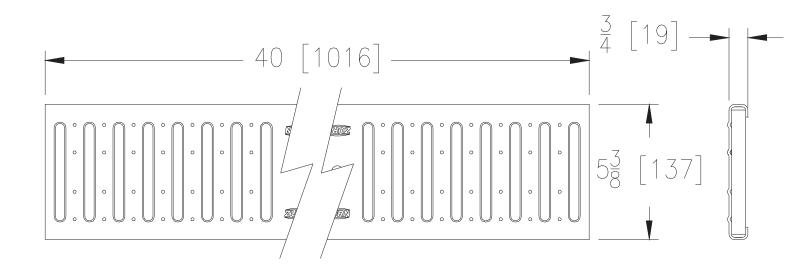

FG GRATE ENGINEERING SPECIFICATION: ZURN P6-FG

40" [1016mm] X 5-3/8" [137mm] Galvanized steel fabricated slotted grate weighing 1.7 lbs per linear foot [2.6kg/m]. The grate has an open area of 12.0 in² per linear foot [253cm²/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, and ADA compliant*. Galvanized skin conforms to ASTM A1011 or ASME A1008, Galvanizing conforms to ASTM A653, Galvanized Coating designation G60, and minimum spangle.



FG - Fabricated Slotted			
Material: Galvanized Steel			
DIN Rating: Class A			
Weight: 1.7 lbs/ft. [2.6kg/m]			
Open Area: 12.0 in ² /ft. [253cm ² /m]			
ANSI Rating: Light-Duty			
Application: Pedestrian Traffic			
Slot Width/Hole Size: 3/8" [9.5mm]			
ADA: Yes*			
H-20: No			
FAA: No			

^{*} Elongated openings must be placed perpendicular to the dominant direction of travel.

Page 21 of 70

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | **Zurn Industries Limited** 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev. AL
Date: 04/16/15
C.N. No. 132548
Form Number: FT641