




DG0646R-DG0657R

HUBBELL POLYCAST REINFORCED PERFORATED GRATE


  	PART NO.	MATERIAL	WEIGHT	OPEN AREA	FLOW RATE
	DG0646R	GALVANIZED	13 LBS.	20%	41.1 GPM PER LINEAR FOOT WITH 1/2" OF HEAD
	DG0646RH		7 LBS.		
	DG0657R	304 SS	13 LBS.		
DG0657RH	7 LBS.				

**DIN APPLICATION LOAD CLASS C:** CURB SIDES, HIGHWAY SHOULDERS, AND PARKING AREAS. DESIGNED FOR A DISTRUBUTED PRESSURE OF 56,200 LBS. (250kN)


**MEETS THE FOLLOWING STANDARDS & SPECIFICATION:**

- DIN 19580 / DIN EN 1433 DRAINAGE CHANNELS FOR VEHICULAR AND PEDESTRIAN AREAS.
- THE AMERICANS WITH DISABILITIES ACT OF 1990: 4.5.4.
- ASME A112.6.3. SECTION 7.12 HEEL RESISTANT STRAINERS AND GRATES.

SYSTEM MFG	SYSTEM	LOCKING DEVICE		LOAD CLASS
		DG0646R	DG0657R	
HUBBELL	POLYCAST 500 W/FRAME	DA0542H	DA0542SH	D
	POLYCAST 600	DA0642	DA0642S	C
	POLYCAST 700	DA0642H	DA0642SH	D
TDS	SS0500	N/A	N/A	-
	SS0600	N/A	SS0642S	C

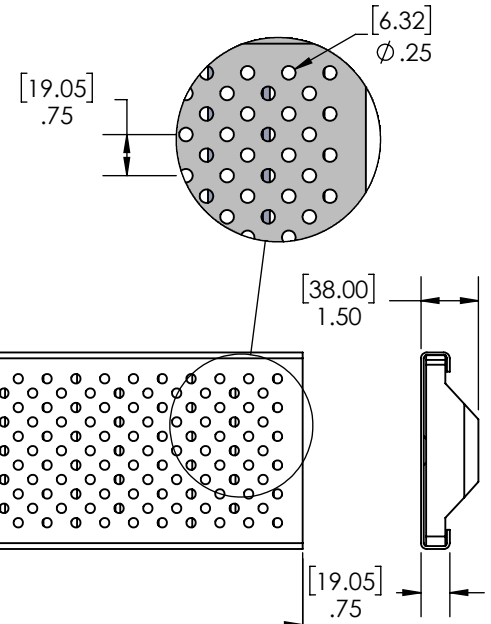

COUNTER-SUNK THRU HOLE FOR 3/8" HARDWARE. (QTY. 2) ON 48" AND (QTY. 1) ON 24"

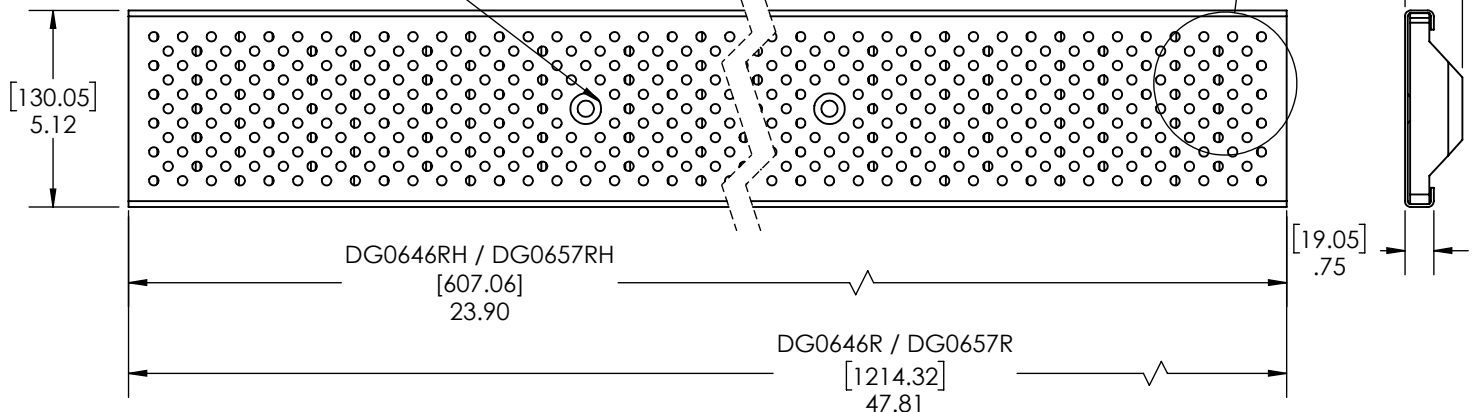

DISCLAIMER - The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.