


Design and Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check √	Item No.	Part Number	Item I.D.
	7	61025	P6-BG

**Back to Index** 

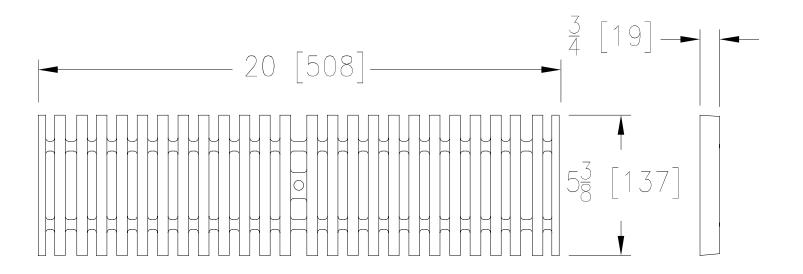

## BG GRATE ENGINEERING SPECIFICATION: The Zurn P6-BG

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron slotted bar grate weighing 5.7 lbs per linear foot [8.5kg/m]. The grate has an open area of 23.9 in² per linear foot [505cm²/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA compliant\*, H-20 load rated, ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

BG - Slotted Bar Grate		
Material:	Galvanized Ductile Iron	
DIN Rating:	Class C	
Weight:	5.7 lbs/ft. [8.5kg/m]	
Open Area:	23.9 in <sup>2</sup> /ft. [505cm <sup>2</sup> /m]	
ANSI Rating:	Heavy-Duty	
Application:	Vehicle Traffic	
Slot Width/Hole Size:	19/64" [7.5mm]	
ADA:	Yes*	
H-20:	Yes	
FAA:	No	

<sup>\*</sup> Elongated openings must be placed perpendicular to the dominant direction of travel.

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Page 7 of 66

**Zurn Industries, LLC | Specification Drainage Operation** 1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited

7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877 892 5216

Rev. AN
Date: 03/04/2022
C.N. No. 144345

Form # FT641