


498

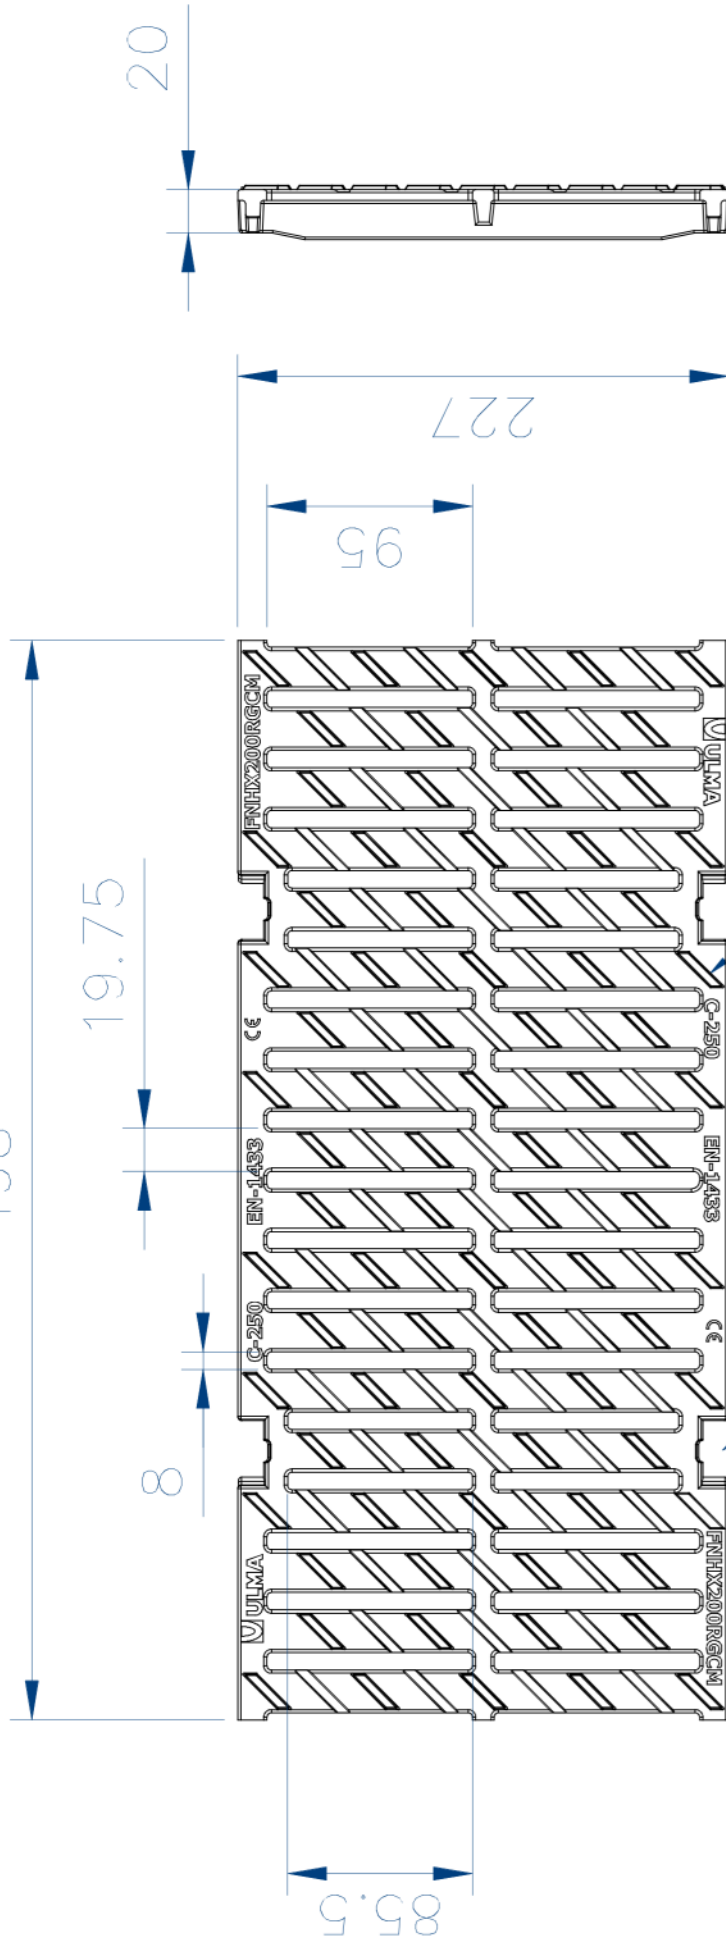

Review: 2017-10

ULMA Architectural Solutions reserves the right to modify the specifications of any of its products without prior notice.  
 Information about the shown products is only indicative and is based on the existing technical features at the time of issuing.  
 In the event of any discrepancy in the translation of this document into different languages, the Spanish version will be used.  
 Latest version in [www.ulmaarchitectural.com](http://www.ulmaarchitectural.com)

For more details, see technical sheets and installation guide.

**ULMA**  
 ARCHITECTURAL SOLUTIONS

**DRAINAGE**  
 SYSTEMS

Tel.: +34 943 78 06 00  
[info@ulmaarchitectural.com](mailto:info@ulmaarchitectural.com)  
[ulmaarchitectural.com](http://ulmaarchitectural.com)

**Description**  
 Non-slip slotted grating reference FNHX200RGCM.  
 Casted espheroidal graphite ductile iron, EN 1563 Standard.  
 Load class C250, EN 1433 Standard.  
 Boltless locking Rapidlock system, 8 fixing points per lm.  
 Bolt-locking system alternative.  
 Ridges and grooves at 45 degrees to divert water.  
 Walking stick and heel-safe slots.  
 Water catching surface: 535 cm<sup>2</sup>/lm.