









*Produced under license of First Plast S.R.L.- Italy

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
836	8" x 20" Pedestrian Traffic Channel Gate Requires #829 screws. 4 screws per grate.  (See pg. 47)	Light Gray	1	1.55	25IN	NDS #836, 8" Wide UV protected high impact Polyolefin pedestrian traffic channel grate. Open surface area 11.70 square inches per foot. 15.33 GPM per foot.
 <p>1/4" Grate Opening</p>		ADA Compliant				

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
837	8" x 20" Light Traffic Channel Gate Requires #829 screws. 4 screws per grate.  (See pg. 47)	Light Gray	1	3.00	25IN	NDS #837, 8" Wide UV protected high impact Polyolefin light traffic channel grate. Open surface area 26.94 square inches per foot. 35.29 GPM per foot.
 <p>5/8" x 2" Grate Opening</p>		ADA Compliant				

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
838	8" x 20" Load Star Heavy Traffic Channel Gate* Requires #829 screws. 4 screws per grate.  (See pg. 47)	Light Gray	1	4.00	25IN	NDS #838, 8" Wide UV protected high impact glass reinforced nylon heavy traffic channel grate. Open surface area 30.85 square inches per foot. 40.41 GPM per foot.
 <p>1/2" x 5 3/4" Grate Opening</p>		ADA Compliant				

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
888	8"x20" Cast Iron Channel Gate #829 screws may be used. 4 screws per grate.  (See pg. 47)	Black	1	14.00	25IN	NDS #888, 8" Wide Heavy Duty Cast Iron Heavy Traffic Channel Gate. Open surface area 41.25 square inches per foot. 54.04 GPM per foot.
 <p>5/16" x 6 1/8" Grate Opening</p>		ADA Compliant				


8" PRO SERIES CHANNEL™ DRAINS

MODULAR CHANNEL DRAINS

Patented


*Produced under license of First Plast S.R.L.- Italy

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
830	8" x 20" Shallow Profile Channel Drain*	Light Gray	1	2.00	25IN	NDS #830, 8" Wide Shallow Profile high impact PVC channel drain with mechanical interlocking joints and UV inhibitors.

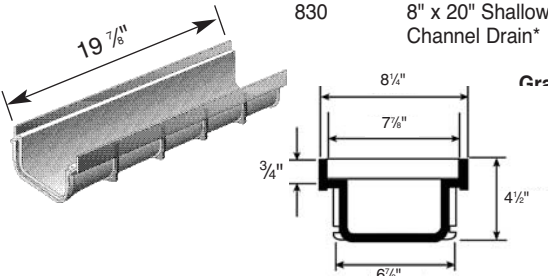


Grate should be recessed 1/8" below finish grade in non traffic applications. Grate should be recessed 1/4" in traffic applications.

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
831	8" Shallow Profile End Cap/ 3" S&D SPT Knock Out End Outlet*	Light Gray	1	0.40	25IN	NDS #831, 8" Wide Shallow Profile high impact PVC End Cap/End Outlet.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
832	8" Shallow Profile 3" S&D SPT Side Outlet*	Light Gray	1	1.00	25IN	NDS #832, 8" Wide Shallow Profile high impact PVC Bottom/Side Outlet.

Bottom outlet fits 4" S&D pipe, 3" S&D fittings




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
833	8" x 20" Deep Profile Channel Drain	Light Gray	1	3.00	25IN	NDS #833, 8" Wide Deep Profile high impact PVC channel drain with mechanical interlocking joints and UV inhibitors.

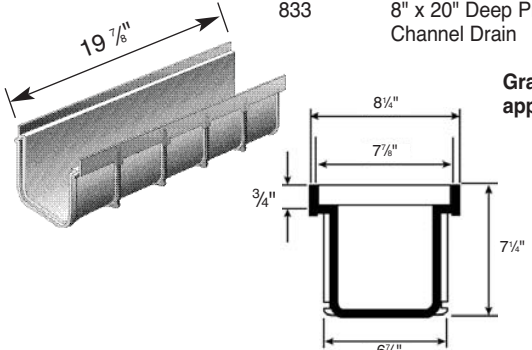

Grate should be recessed 1/8" below finish grade in non traffic applications. Grate should be recessed 1/4" in traffic applications.

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
834	8" Deep Profile End Cap/ 3"&4" S&D SPT Knock Out End Outlet	Light Gray	10	1.20	25IN	NDS #834, 8" Wide Deep Profile high impact PVC End Cap/End Outlet.



Note: All dimensions are nominal. All weights are for shipping purposes only. Availability is subject to change.