

U100K



AK100

Description:

ULMA Polymer concrete linear drainage sump unit model AK100.

Protective galvanized steel edge with a real thickness of 1+1mm, smooth, without breakage of the protective zinc layer, avoiding water accumulation and preventing corrosion.

2 point locking bar system.

Load class up to C250, EN 1433 Standard.

Vertically and horizontally aligning tongue and groove joints.


CE Conformity Declaration and compliance with EN 1433 Standard.

Total height 22.05 inches, internal width 3.93 inches, total width 5.11 inches, and total length 19.69 inches.

Ø4.33 inches and Ø6.3 inches pre-formed knockouts.

Sump units and accessories table

Code	L (inches)	H (inches)	Width (inches)	Ø Outlet (inches)		Sump Units	Bucket
				Lateral	Front		
AK100	19.69	22.05	5.11	4.33/6.30	3.54	1	CU100

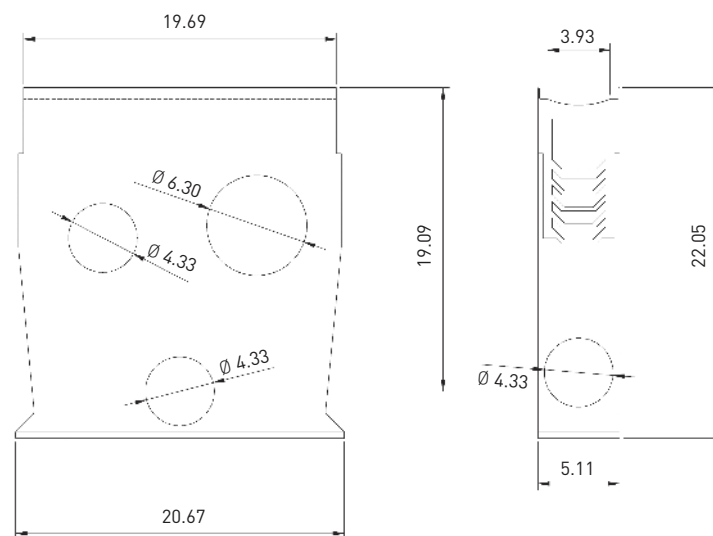

© June, 2016 ULMA Architectural Solutions. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ULMA Architectural Solutions reserves the right to change the product and specifications without notice.