


Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (lbs[kg]).

Please	Item	Part	ltem
Check	No.	Number	I.D.
\checkmark			
	48	308340	P6-RFSC

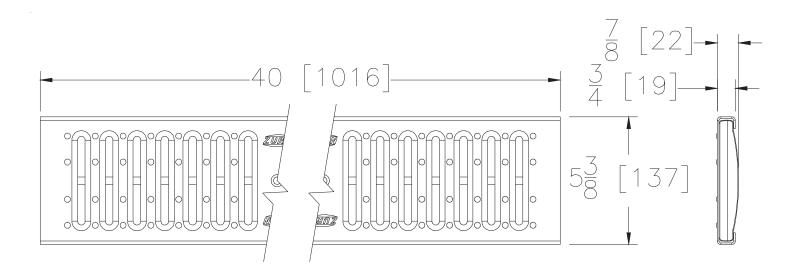

RFSC GRATE ENGINEERING SPECIFICATION: ZURN P6-RFSC

40" [1016mm] X 5-3/8" [137mm] Stainless steel reinforced slotted grate weighing 5.2 lbs per linear foot [7.9kg/m]. The grate has an open area of 12.0 in² per linear foot [254cm²/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA compliant* and H-20 load rating. Stainless steel grate conforms to ASTM A351 Type 304 (Grade CF8M Type 316 by request) cast body and A-240 TYPE 304 (or 316 by request) for grate skin.

RFSC - Reinforced Slotted			
Material: Type 304 Stainless Steel			
DIN Rating	g: Class C		
Weight:	5.2 lbs/ft. [7.9kg/m]		
Open Area: 12.0 in²/ft. [254cm²/m]			
ANSI Rating: Heavy-Duty			
Application	n: Roadway		
Slot Width/	/Hole Size: 3/8" [9.5mm]		
ADA:	Yes*		
H-20:	Yes		
FAA:	No		

* Elongated openings must be placed perpendicular to the dominant direction of travel.

Page 48 of 70

Back to Index