

436

## TDS WEDGE WIRE 316L STAINLESS STEEL GRATE




PART NO.	MATERIAL	WEIGHT	OPEN AREA	FLOW RATE
436	316L MARINE STAINLESS	10.0 LBS.	43%	86.29 GPM PER LINEAR FOOT WITH 1/2" OF HEAD
437		5.0 LBS.		

**APPLICATION LOAD CLASS B125:** SIDEWALKS, PARKING LOTS AND CAR PARKING DECKS. DESIGNED FOR A DISTRIBUTED PRESSURE OF 28,100 LBS. (125kN) ADA COMPLIANT FOR ACCESSIBLE ROUTES.

**MEETS THE FOLLOWING STANDARDS AND SPECIFICATIONS:**

- THE AMERICANS WITH DISABILITIES ACT OF 1990: 4.5.4
- ASME A112.6.3 SECTION 7.12 HEEL RESISTANT STRAINERS AND GRATES

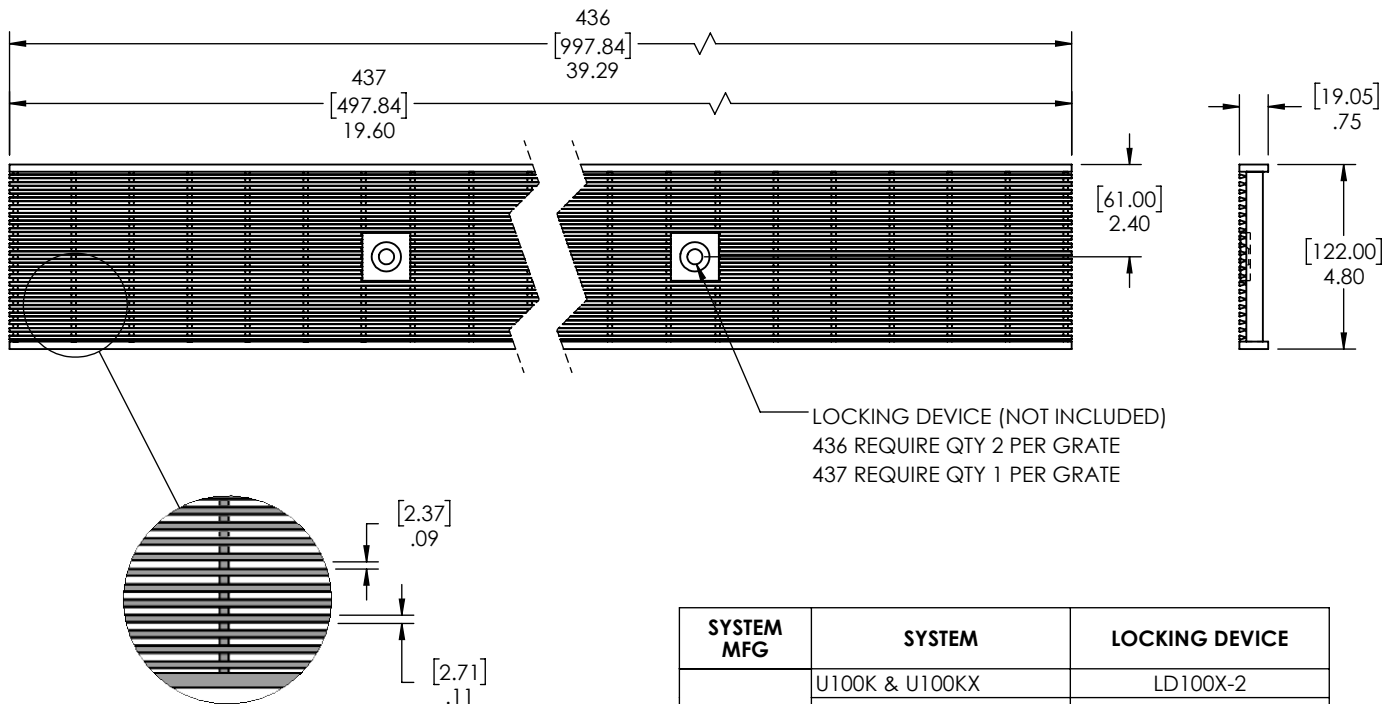

SYSTEM MFG	SYSTEM	LOCKING DEVICE
ULMA	U100K & U100KX	LD100X-2
	U100K CATCH BASIN	LD100X-2CB
	M100K & M100KX	LD100MX-2
	M100V	LD100MX-2
	HYDROPLUS	LD100X-2
	HYDROPLUS MINI	LD100MX-2
	D100	LD100X-2