

DG0622R-DG0632R

BRONZE AGE REINFORCED FOAM PATTERN 5.12" WIDE GRATE




PART NO.	MATERIAL	WEIGHT	OPEN AREA	FLOW RATE
DG0622R	GALVANIZED	13 LBS.	19%	40.4 GPM PER LINEAR FOOT WITH 1/2" OF HEAD
DG0622RH		7 LBS.		
DG0632R	304 SS	13 LBS.		
DG0632RH		7 LBS.		

**DIN APPLICATION LOAD CLASS B:** SIDEWALKS, PARKING LOTS AND CAR PARKING DECKS.  
DESIGNED FOR A DISTRIBUTED PRESSURE OF 28,100 LBS. (125kN)


**MEETS THE FOLLOWING STANDARDS & SPECIFICATION:**

- DIN 19580 / DIN EN 1433 DRAINAGE CHANNELS FOR VEHICULAR AND PEDESTRIAN AREAS.
- THE AMERICANS WITH DISABILITIES ACT OF 1990: 4.5.4.
- ASME A112.6.3. SECTION 7.12 HEEL RESISTANT STRAINERS AND GRATES.

SYSTEM MFG	SYSTEM	LOCKING DEVICE
HUBBELL	POLYCAST 500 W/FRAME	DA0542H
	POLYCAST 600	DA0642S
	POLYCAST 700	DA0642H
TDS	SS0600	SS0642S

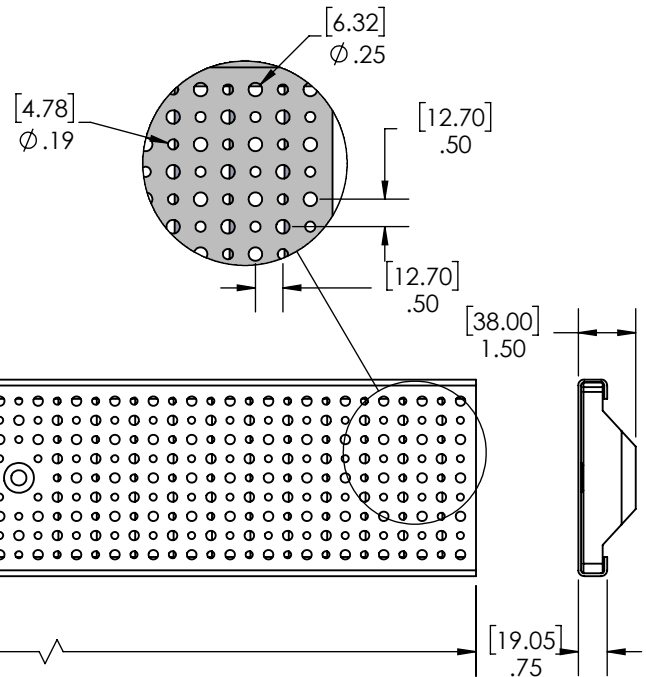

COUNTER-SUNK THRU HOLE FOR  
3/8" HARDWARE. (QTY. 2) ON 48"  
AND (QTY. 1) ON 24"

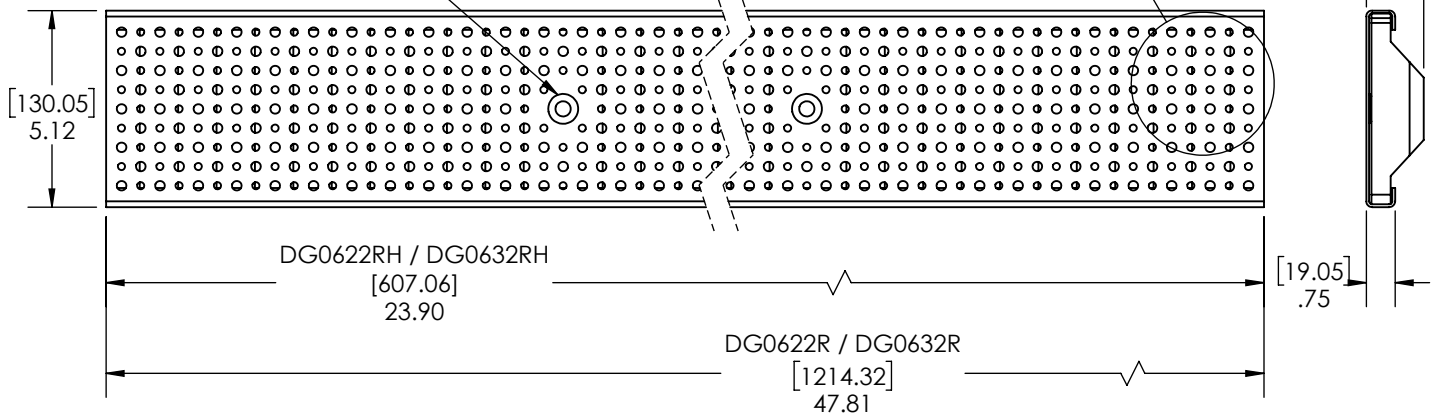

DISCLAIMER - The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.