

**TDS-FOAM-0336**

**BRONZE AGE FOAM PATTERN 2.69" WIDE GRATE**




PART NO.	GRADE OF STAINLESS	WEIGHT	OPEN AREA	FLOW RATE	GRATE HOLD DOWN HARDWARE (NOT INCLUDED)
TDS-FOAM-0312-L	316L (MARINE)	0.50 LBS.	10%	10.84 GPM PER LINEAR FOOT WITH 1/2" OF HEAD	NDS-529
TDS-FOAM-0336-L		1.50 LBS.			

**MEETS THE FOLLOWING STANDARDS AND SPECIFICATIONS:**

- DIN 19580 / DIN EN 1433 DRAINAGE CHANNELS FOR VEHICULAR AND PEDESTRIAN AREAS.
- THE AMERICANS WITH DISABILITIES ACT OF 1990: 4.5.4
- ASME A112.6.3 SECTION 7.12 HEEL RESISTANT STRAINERS AND GRATES.


SYSTEM MFG	SYSTEM
TDS	MAX-MINI
NDS	MINI CHANNEL

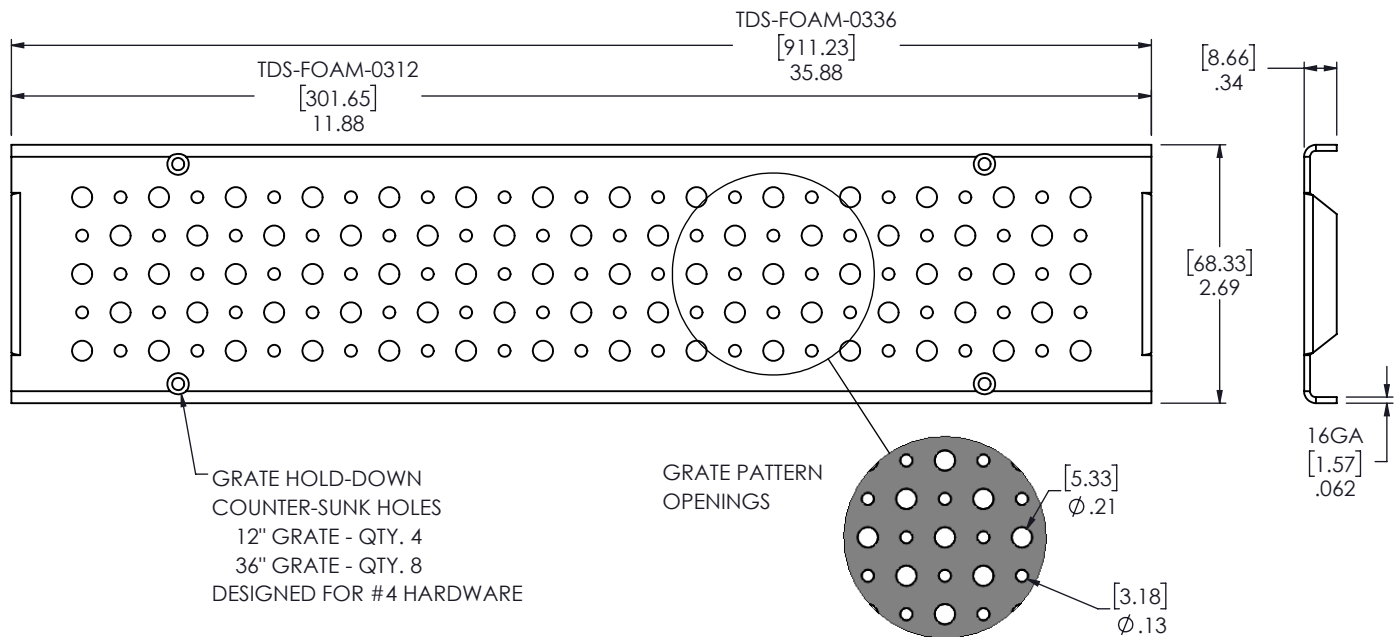

GRATE HOLD-DOWN  
 COUNTER-SUNK HOLES  
 12" GRATE - QTY. 4  
 36" GRATE - QTY. 8  
 DESIGNED FOR #4 HARDWARE


GRATE PATTERN  
 OPENINGS

FACE OF GRATE INSTALLED FLUSH WITH  
 SURROUNDING SURFACE. REFER TO NDS  
 MINI CHANNEL INSTALLATION GUIDE.



**DIN APPLICATION LOAD CLASS A:**  
 RESIDENTIAL, PEDESTRIAN AND  
 CYCLIST TRAFFIC. DESIGNED FOR A  
 DISTRIBUTED PRESSURE OF  
 3,372 LBS. (15kN)

FACE OF GRATE INSTALLED 1/4" (0.25") BELOW  
 SURROUNDING SURFACE. REFER TO NDS  
 MINI CHANNEL INSTALLATION GUIDE.



**DIN APPLICATION LOAD CLASS B:**  
 SIDEWALKS, PARKING LOTS AND  
 CAR PARKING DECKS. DESIGNED  
 FOR A DISTRIBUTED PRESSURE OF  
 28,100 LBS. (125kN)