


Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (lbs[kg]).

Please	Item	Part	Item
Check	No.	Number	I.D.
\checkmark			
	38	57153	P6-LD

Back to Index

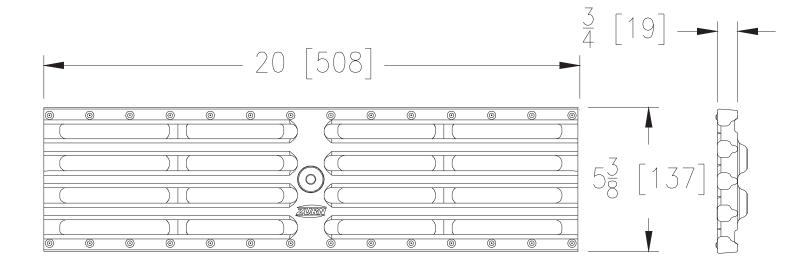

LD GRATE ENGINEERING SPECIFICATION: ZURN P6-LD

20" [508mm] X 5-3/8" [137mm] Ductile Iron longitudinally slotted grate weighing 6.7 lbs per linear foot [9.8kg/m]. The grate has an open area of 20.5 in² per linear foot [433cm²/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, and ASTM A536 Grade 80-55-06.

LD - Longitudinal Slotted			
Material: Du	uctile Iron		
DIN Rating: Class B			
Weight: 6.	.7 lbs/ft. [9.8kg/m]		
Open Area: 20.5 in²/ft. [433cm²/m]			
ANSI Rating: Medium-Duty			
Application: Sidewalks,			
Slot Width/Hole Size: 1/2" [12.7mm]			
ADA:	No		
H-20:	No		
FAA:	No		

Page 38 of 70

Rev. AL
Date: 04/16/15
C.N. No. 132548
Form Number: FT641