



610-638-1221
 sales@trenchdrain.com
 PO BOX 377 - FREMONT, OH 43420

PROJECT ID: _____
 CONTRACT NO: _____

LOCATION: _____

RELEASED: 1.21.26
 REVISION: F


DG1246 (FORMERLY FG1246)	TRENCHERA SLOTTED DUCTILE IRON GRATE 14.66"
------------------------------------	---



MATERIAL	WEIGHT	OPEN AREA	FLOWRATE
DUCTILE IRON	66.90 LBS.	62%	369.58 GPM PER LINEAR FOOT WITH 1/2" OF HEAD

DIN APPLICATION LOAD CLASS F:
 SPECIAL AREAS WITH HEAVY WHEEL LOADS, E.G.
 AIRPORTS AND DOCKS. DESIGNED FOR A DISTRIBUTED
 PRESSURE OF 202,320 LBS. (900kN)

SYSTEM	INSTALLATION PACK
FP1200 (WELDED FRAME W/CROSSBARS)	HW FGS
1200 SERIES (TRENCHERA)	FA1442B
SS1200	SA1442B
SS SERIES (SS651 CATCH BASIN)	SA1442B

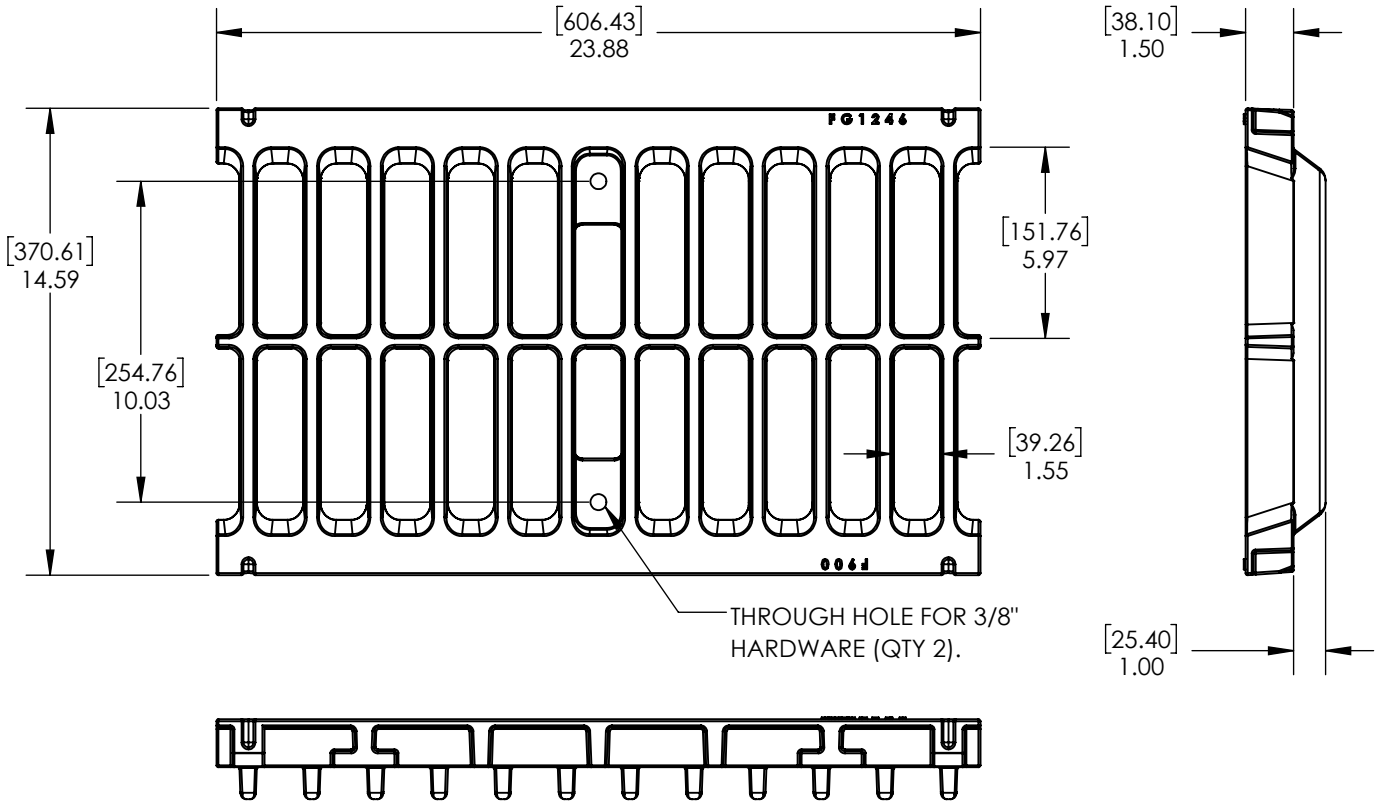

DISCLAIMER - The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation and maintenance of any product purchased from Trench Drain Systems and/or its manufacturers. TRENCH DRAIN SYSTEMS MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.