




P6-PG

6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in²[mm²], & Weight (lbs[kg])).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	41	64078	P6-PG

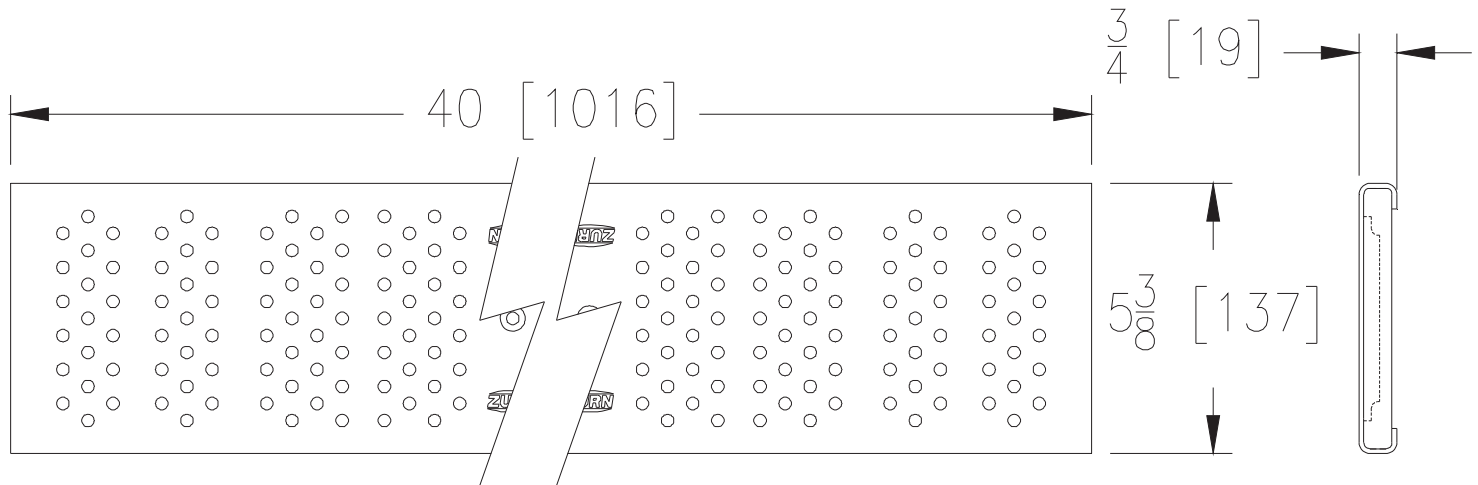

PG GRATE ENGINEERING SPECIFICATION: ZURN P6-PG

40" [1016mm] X 5-3/8" [137mm] Galvanized steel fabricated perforated grate weighing 1.6 lbs per linear foot [2.3kg/m]. The grate has an open area of 5.3 in² per linear foot [112cm²/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant. Carbon steel conforms to ASTM A653 Type CS-B, galvanized coating designation G60, minimum spangle.



PG - Fabricated Perforated	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.6 lbs/ft. [2.3kg/m]
Open Area:	5.3 in ² /ft. [112cm ² /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No

Page 41 of 70